



Date
Quote #
Project Name
Type

2SBK - Wall Mount

Description:

Door frame design made of heavy duty aluminum. 2SBK comes with a bi-directional pattern (Up & Down Light). Various beam spreads available such as narrow beam, medium beam, and wide beam.



Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine		Source Lumens	Color Temp	Electrical
2SBK-6X15	6X15	18W LED/Side 70 MH	4756	3000K	UNV 120-277V
2SBK-8X15	8X15	29W LED/Side 100 MH	6470	3500K	HLV 347-480V
2SBK-8X18	8X18	40W LED/Side 175 MH	11500	4000K	TT Tri-Tap(HID)
				5000K	MT Multi-Tap(HID)
	Contact for custom		Contact for custom	Contact for custom	

Mounting		Lens		Light Pattern		Options		Finishes	
WM	Wall mount	CG	Clear glass lens	WB	Wide beam	DM	0-10V dimming	BL	Black
		FG	Frosted glass lens	MB	Medium beam	WL	Wet location	WH	White
		PG	Prismatic glass lens	NB	Narrow beam	PC	Button photocell	SG	Silver Grey
						TP	Tamperproof hardware	BZ	Bronze
						TS	Tamperproof screws	CC	Custom Color
						RGBW	Programmable color changing LEDs	See website for custom colors. Contact factory for physical samples.	
						AEL	Quartz restrrike (relay)		
						MEL	Quartz restrrike (no relay)		

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering

Since product development is an on-going process, Solera reserves the right to change the information on this spec sheet.

Date Modified: 09-17-2019







Dimensions & Mounting:

Please note that drawings are not to scale.

Side view

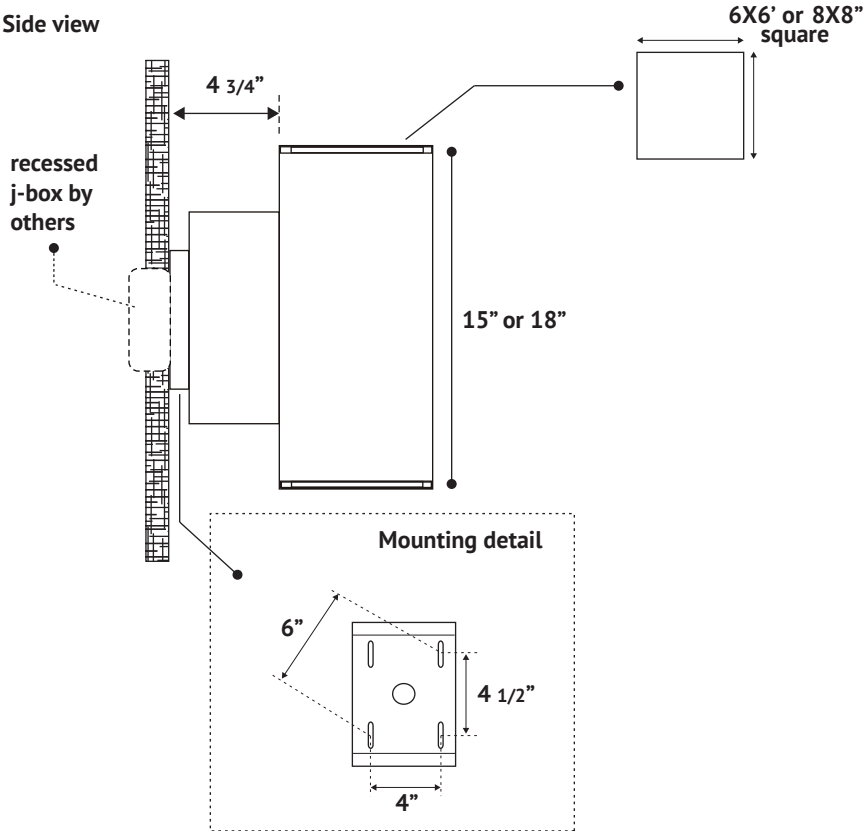

Isometric view



2SBK6 & 2SBK8

Listing:

Complies to CSA and UL standards.

Polar Graph:

