



Date:
Type:
Project:



2SRBK - WALL MOUNT

DESCRIPTION:

SRBK is a surface mounted cylinder available with a wide beam or narrow beam distribution pattern. 2SRBK has an Up/Down light. Various sizes available.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting		
2SRBK-6-15	6X15	18W LED/Side 70 MH 70 HPS	4756	3000K	UNV	120-277V	WM	Wall Mount	
2SRBK-8-15				4000K	HLV	347-480V			
2SRBK-8-20				5000K	TT	Tri-Tap (HID)			
	8X15	29W LED/Side 100 MH PLT57	6470		MT	Multi-Tap (HID)			
	8X20	40W LED/Side 175 MH	11500						
	*Contact for other wattages		*Contact for custom	*Specify other					

Lens		Light Pattern		Options		Finishes	
CG	Clear Glass Lens	NB	Narrow Beam	DM	0-10V Dimming	BL	Black
FG	Frosted Glass Lens	MB	Medium Beam	IP65	IP65 Rated Enclosure	WH	White
PG	Prismatic Glass Lens	WB	Wide Beam	AEL	Quartz Restrike (Relay)	SG	Silver Grey
				MEL	Quartz Restrike (No Relay)	BZ	Bronze
				PC	Button Photocell	CH	Chrome
						ANO	Anodized Aluminum
							*See finishes brochure for custom

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering



2SRBK- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

Customization Notes:

*** Info on this spec sheet will change without notice as product development is an ongoing process.



Dimensions & Mounting (drawings are not to scale)

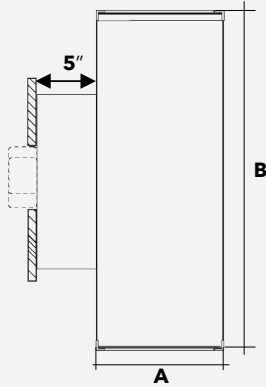

	A	B
SRBK (6X15)	6"	15"
SRBK (8X15)	8"	15"
SRBK (8X18)	8"	18"

Polar Graph

