



Date:
Type:
Project:



AUR-C - CEILING MOUNT

DESCRIPTION:

Cold rolled steel frame with one piece opal polycarbonate lens.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
	Size	LED Count			UNV	HLV	CM	Mounting
AUR-C-14	14"	12 LED (Max)	2112	3000K	UNV	120-277V	CM	Ceiling Mount
AUR-C-16	16"	20 LED (Max)	3520	4000K	HLV	347-480V		
AUR-C-24	24"	30 LED (Max)	5280	5000K				
	*Contact for other wattages		*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
OPL	Opal Polycarbonate Lens (Std)	D	Down Light	DM	0-10V Dimming	BL	Black	
				DM1	1% Dimming	WH	White	
				WL	Wet Location	SG	Silver Grey	
				MAL	Mesh Around Lens	BZ	Bronze	
				SF	Single Fuse			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering



AUR-C- _____

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.




Dimensions & Mounting (drawings are not to scale)

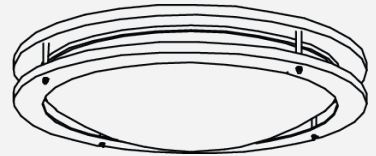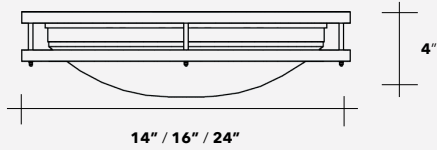

ISO View

Polar Graph

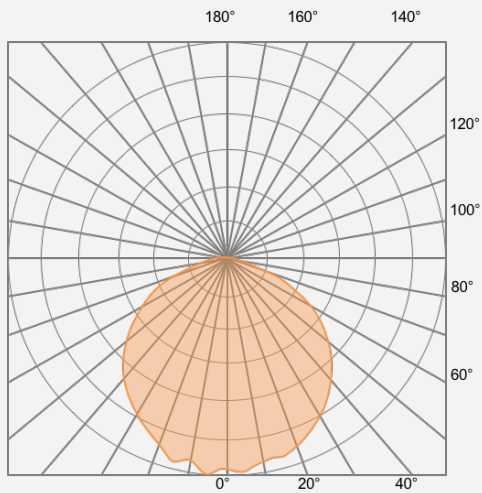

Down Light