



Date
Quote #
Project Name
Type



AURORA - Ceiling Mount

Description:

Cast aluminum frame with an opal polycarbonate lens and glow band. Regressed stainless steel allen screws are standard.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
AURORA	20W LED (Max)	3520	2700K	UNV 120-277V
	70MH		3000K	HLV 347-480V
	100MH		3500K	TT Tri-Tap(HID)
	2PLT26		4000K	MT Multi-Tap(HID)
			5000K	
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
CM Ceiling mount	OPL Opal Polycarbonate Lens (Std)	DS Down & side light (Std)	DM 0-10V dimming	Standard
WM Wall mount		D Down light	WL Wet location	BL Black
		S Side light	MAL Mesh around lens	WH White
			SF Single fuse	SG Silver Grey
			MOD Modified height	BZ Bronze
			RGBW Programmable color changing LEDs	Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.




- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

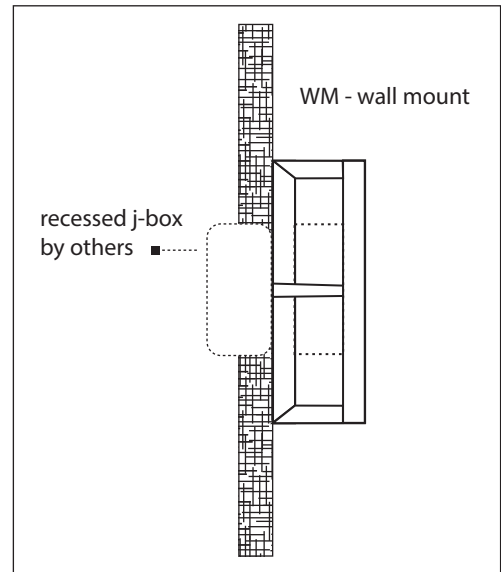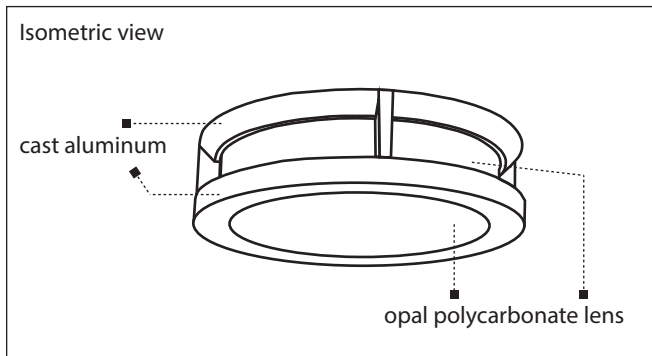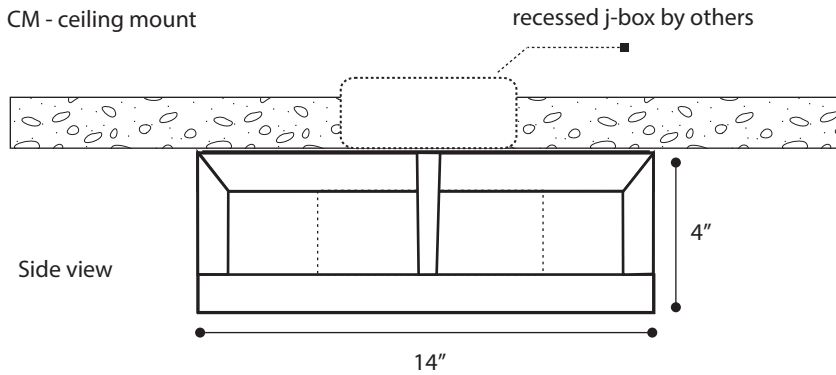

Listing:

Complies to CSA and UL standards.

Polar Graph:

