



<b>Date:</b>
<b>Type:</b>
<b>Project:</b>

### AURORA - WALL MOUNT

**DESCRIPTION:**

Cast aluminum frame with one piece opal polycarbonate lens and glow band. Regressed stainless steel allen screws are standard.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
AURORA	20W LED	3520	3000K	UNV	120-277V	WM	Wall Mount
	70MH		4000K	HLV	347-480V		
	100MH		5000K	TT	Tri-Tap (HID)		
	2PLT26			MT	Multi-Tap (HID)		
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
OPL	Opal Polycarbonate Lens	FL	Front & Side Light (Std)	IP65	IP65 Rated Enclosure	BL	Black	
FG	Frosted Glass Lens	F	Front Light Only	ELB	Electronic HID Ballast	WH	White	
		S	Side Light Only	PC	Button Photocell	SG	Silver Gray	
				SF	Single Fuse	BZ	Bronze	
				DM	0-10V Dimming			
				MOD	Modified Height			
				T6	T6 G12 Operation			
				MAL	Mesh Around Lens			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT



Std - Standard Offering

AURORA-WM-\_\_\_\_\_

**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

## Dimensions & Mounting

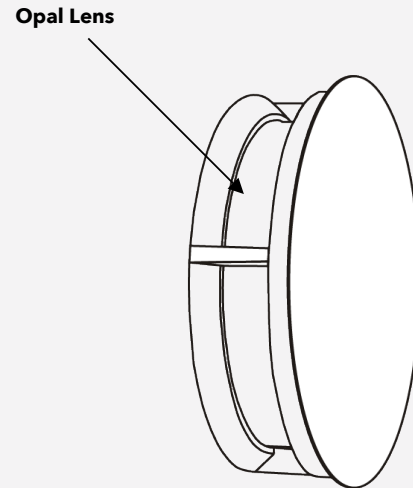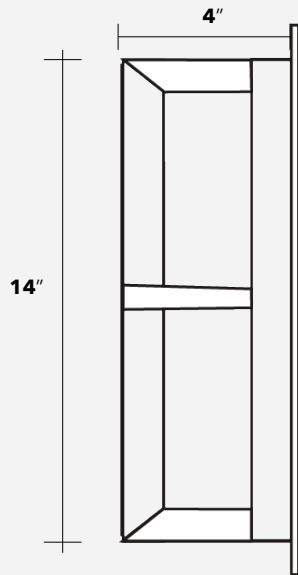

## Polar Graph

