



| |
|-----------------|
| Date: |
| Type: |
| Project: |



AXD-S - POST TOP/ POLE MOUNT

DESCRIPTION:

Constructed of cast aluminum and comes with a silicone sealed lens for weather tight seal.

| Name | Lamping | Lumens | Color Temp | Electrical | | Mounting | |
|-------|-----------------------------|---------------------|----------------|------------|----------------|----------|---------------------------------|
| AXD-S | 50W LED (Max) | 6949 | 3000K | UNV | 120-277V | PT4 | Post top slips over 4" dia pole |
| | 70MH-T6 | | 4000K | HLV | 347-480V | PT3 | Post top slips over 3" dia pole |
| | | | 5000K | TT | Tri-Tap (TT) | | |
| | | | | MT | Multi-Tap (MT) | | |
| | | | | | | | |
| | *Contact for other wattages | *Contact for custom | *Specify other | | | | |

| Lens | | Light Pattern | | Options | | Finishes | |
|------|--------------------------------|---------------|--------------|---------|-------------------------|-------------------------------|-------------|
| CPL | Clear Polycarbonate Lens (Std) | TY5 | Type V (Std) | TP | Tamperproof Hardware | BL | Black |
| PR | Prismatic Lens (K12) | TY3 | Type III | TS | Tamperproof Screwdriver | WH | White |
| OPL | Opal Polycarbonate Lens | TY2 | Type II | PC | Button Photocell | SG | Silver Grey |
| | | ASM | Asymmetric | SF | Single Fuse | BZ | Bronze |
| | | | | | | *See finishes info on website | |

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering


AXD-S- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

Customization Notes:


▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.



Dimensions & Mounting (drawings are not to scale)



Polar Graph

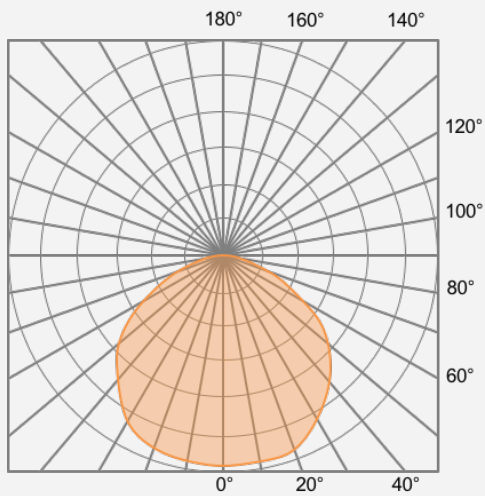

TYPE V