



Date
Quote #
Project Name
Type



BONGO - Post Top

Description:

BONGO is post-top with a modern appearance. Light is distributed by an indirect throw. Both symmetric and asymmetric patterns available. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
BONGO	60W LED (Max)	8010	3000K	UNV 120-277V
	150 HPS		3500K	HLV 347-480V
	150MH-T6		4000K	TT Tri-Tap(HID)
	150MH ED17 Base		5000K	MT Multi-Tap(HID)
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
PT3 Post top slips over 3" pole	CPL Clear polycarbonate lens (Std)	SYM Symmetric (Std)	SD Step dimming	Standard BL Black
PT4 Post top slips over 4" pole	PR Prismatic lens (K12)	ASM Asymmetric	MS Motion sensor	WH White
WM Wall mount	CG Clear glass lens		TCO Trespass cut off	SG Silver Grey
			TP Tamperproof hardware	BZ Bronze
			TS Tamperproof screws	Custom CC Custom Color
			PC Bottom photocell	See website for custom colors. Contact factory for physical samples.
			SF Single fuse	

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering










Dimensions & Mounting:

Please note that drawings are not to scale.

Side view

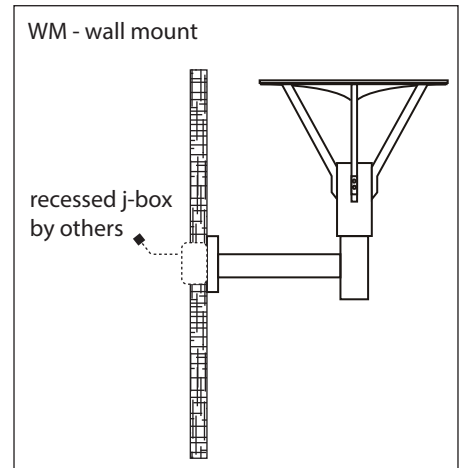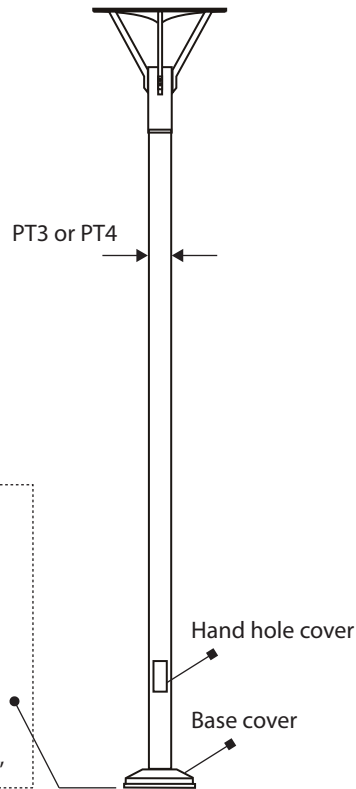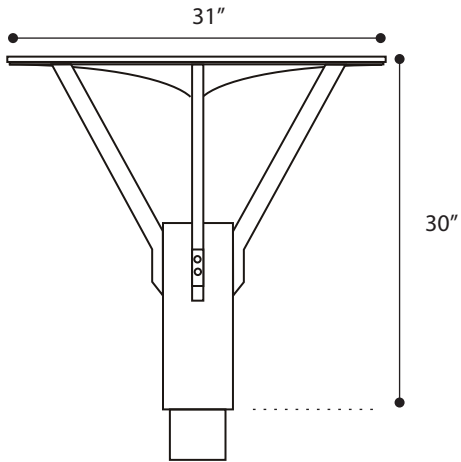


Listing:

Complies to CSA and UL standards.

Polar Graph:

SYM

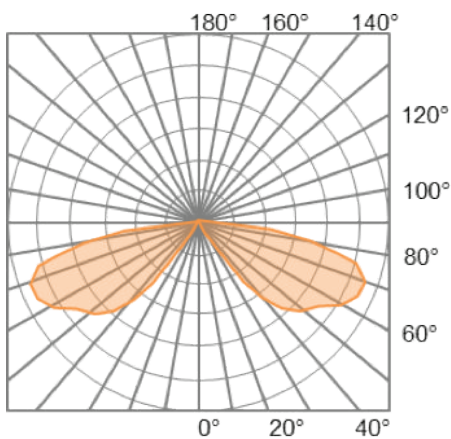

ASM

