



Date
Quote #
Project Name
Type



## BULLET - Bollard

### Description:

Constructed of pre-cast concrete where top cap is removable for lamping/driver replacement and maintenance.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
BULLET	42 LED (Max)	5450	3000K	UNV 120-277V
	70 MH		3500K	HLV 347-480V
	42 PLT		4000K	TT Tri-Tap(HID)
	70 HPS		5000K	MT Multi-Tap(HID)
	35 LPS			

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts & template	OPL	Opal polycarbonate lens (Std)	TY5	Type V (Std)	TP	Tamperproof hardware	CONC	Concrete finish
		CPL	Clear polycarbonate lens	TY3	Type III	PC	Bottom photocell		Natural grey aggregate is standard. For other aggregates see website.
				180	180 degrees				


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

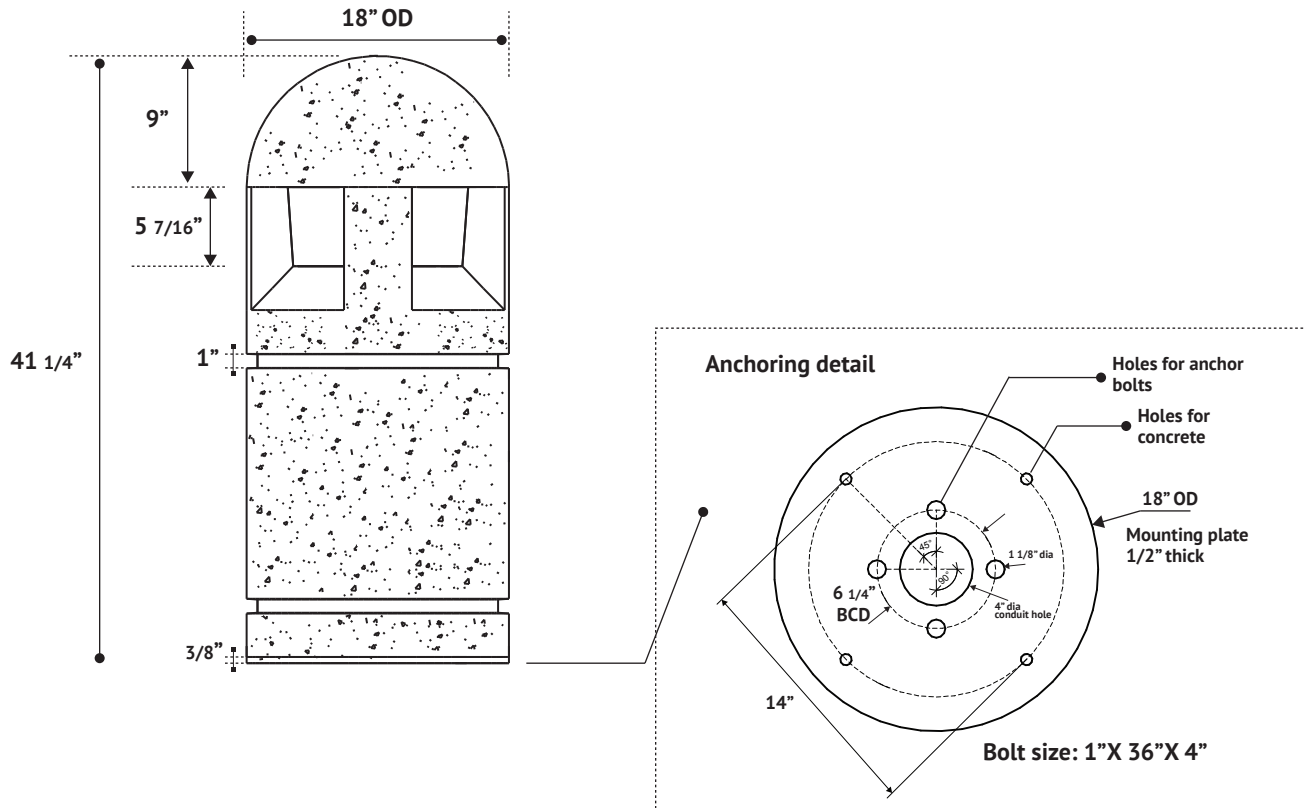

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

