



Date:
Type:
Project:



BULLET - BOLLARD

DESCRIPTION:

Constructed of pre-cast concrete where top cap is removable for lamping/driver replacement and maintenance.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
BULLET	42 LED (Max)	5450	3000K	UNV	120-277V	ABT	Anchors, Bolts & Template
	70 MH		4000K	HLV	347-480V		
	42 PLT		5000K	TT	Tri-Tap (HID)		
	70 HPS			MT	Multi-Tap (HID)		
	35 LPS						
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
OPL	Opal Polycarbonate Lens	TY5	Type V (Std)	TP	Tamperproof Hardware	NG	Natural Grey
CPL	Clear Polycarbonate Lens	TY3	Type III	TS	Tamperproof Screwdriver	CA	Other concrete aggregates available
				PC	Button Photocell		
				GFR	Ground Fault Receptacle		
				HCO	House Side Cutoff		
						*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

BULLET- _____


Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.


Dimensions & Mounting (drawings are not to scale)

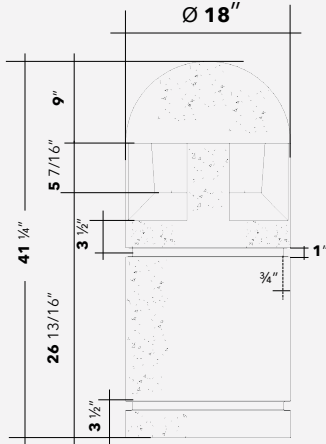

Anchoring Details

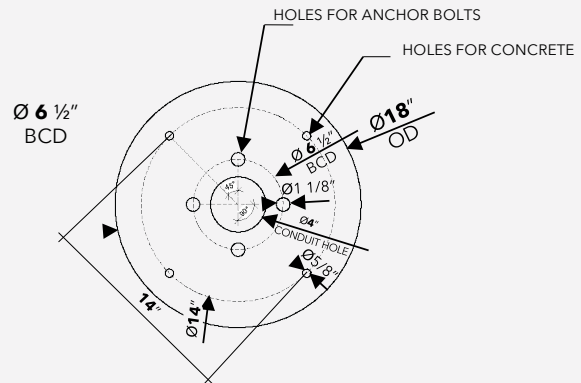

Polar Graph

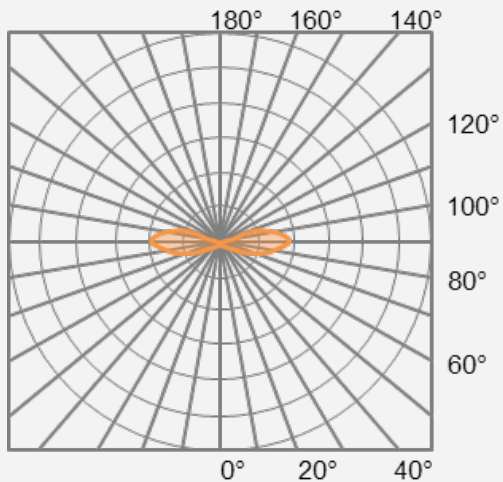

TYPE V