



Date
Quote #
Project Name
Type



CAPR - Pendant

Description:

Rectilinear pendant with an aluminum frame and fabric or vinyl exterior. All external hardware is stainless steel

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
CAPR-24	24 20 LED (Max)	3522	2700K	UNV 120-277V
CAPR-48	48 40 LED (Max)	7043	3000K	HLV 347-480V
CAPR-60	60 52 LED (Max)	9155	3500K	
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
2AC24 2X24" aircraft cables (Std)	OAL Opal acrylic lens (Std)	D Down light (Std)	DM 0-10V dimming	Standard
2P6 2X6" pendant stems	OPL Opal polycarbonate lens	UD Up and down light	DM1 1% dimming	FAB Fabric
CM Ceiling mount			EM Emergency battery	VIN Vinyl
			BG Bug shield	Custom
				Contact factory for finish samples, custom prints also available. See website for colors/textures on fabric and vinyl finishes.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.


Side view

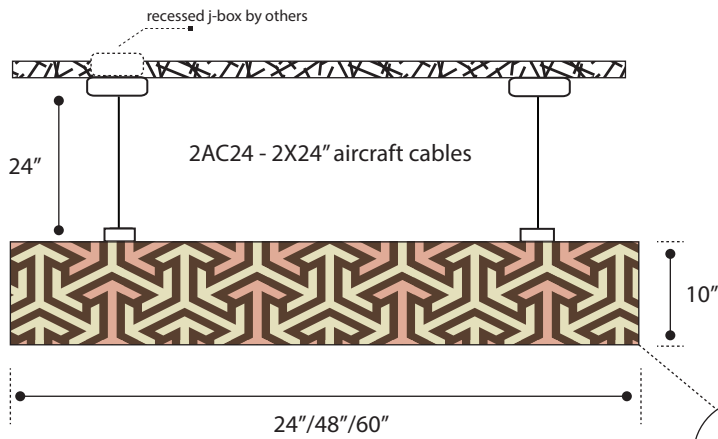

2P6 - 2X6" pendant stem

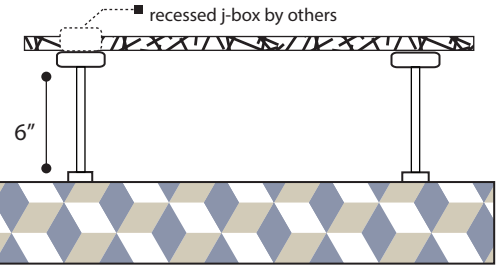


CM - ceiling mount

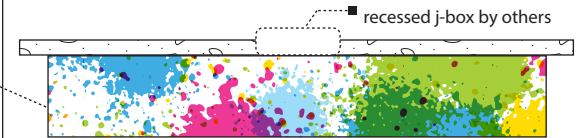

Custom prints possible
(contact factory)

Isometric view

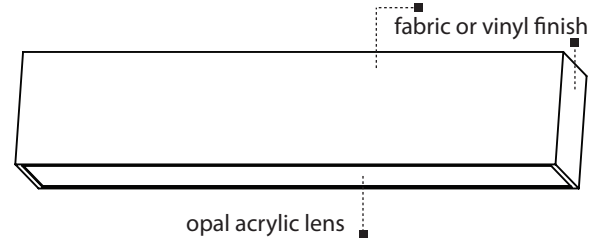

Listing:

Complies to CSA and UL standards.

Polar Graph:

