



Date:
Type:
Project:



CHANDE - PENDANT

DESCRIPTION:

Aluminum frame and housing construction. Available in 3 different sizes.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
CHANDE-24	24"	20 LED	3520	3000K	UNV	120-277V	4P12	4X12" Pendant Stem
CHANDE-36	36"	30 LED	5280	4000K	HLV	347-480V	3AC48-SPD	3 aircraft cables connect to spider mount hub
CHANDE-42	42"	40 LED	7040	5000K			3AC48-SPD-P	Combination of aircraft cables and stem
	*Contact for other wattages		*Contact for custom	*Specify other			*Contact for other lengths	

Lens		Light Pattern		Options		Finishes		
OAL	Opal Acrylic Lens (Std)	D	Down Light (Std)	DM	0-10V Dimming	BL	Black	
FL	Frosted Lens			DM1	Dimming 1%	WH	White	
ABL	Alabaster Lens			RB	Remote Ballast/Driver	SG	Silver Grey	
				EM	Emergency Battery	BZ	Bronze	
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering


CHANDE- _____

Customization Notes:


▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.




Dimensions & Mounting (drawings are not to scale)

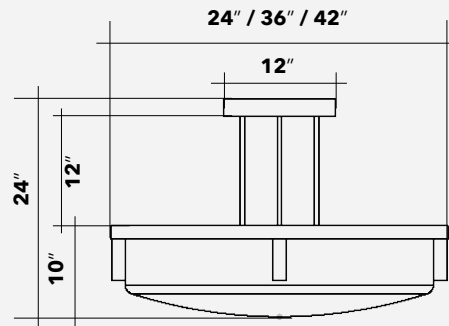

3AC48 - SPD - P



3AC48 - SPD



Polar Graph

