



Date
Quote #
Project Name
Type



CIRC-II - Pendant

Description:

This circular pendant does not have a lens and provides an indirect lighting effect. Various mounting systems available. Select between lens profile 4" or 6 1/4".

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
CIRC-II-24	24 24W LED	4756	2700K	UNV 120-277V
CIRC-II-36	36 36W LED	6336	3000K	HLV 347-480V
CIRC-II-48	48 48W LED	8448	3500K	
CIRC-II-60	60 60W LED	10560	4000K	
CIRC-II-72	72 72W LED	12672	5000K	

Higher wattages available
(contact factory)

Contact for custom

Contact for custom


Mounting	Lens	Light Pattern	Options	Finishes
3AC48-CMB 3X48" aircraft cables with individual canopies	Not available	RG Reflective glow	DM 0-10V dimming DM1 1% dimming	BL Black WH White
3AC48-SPD 3 aircraft cables connect to spider mount hub			2CC 2 circuit wiring	SG Silver Grey
3AC48-TR 3 aircraft cables converge to a single canopy			SF Single fuse	BZ Bronze
3AC48-SPD-P Combination of aircraft cables and stem			EM Emergency battery	CC Custom Color
			RB Remote ballast/driver	See website for custom colors. Contact factory for physical samples.
			RGBW Programmable color changing LEDs	

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






Dimensions & Mounting:

Please note that drawings are not to scale.

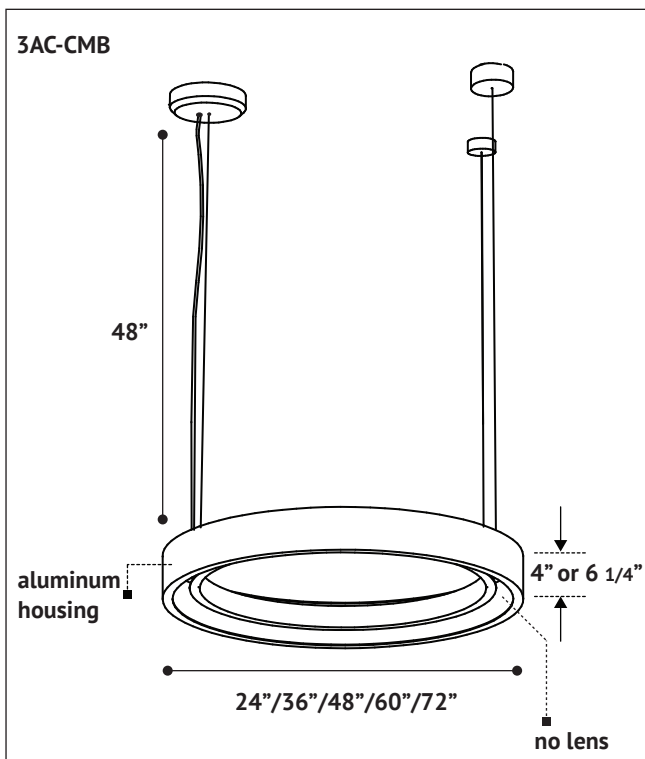

Other mounting arrangements

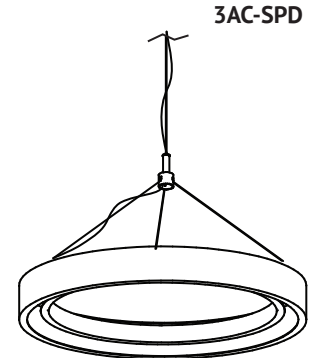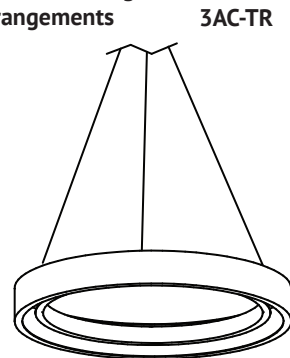

Listing:

Complies to CSA and UL standards.

Polar Graph:

