



Date:

Type:

Project:



CMAQ - WALL MOUNT

DESCRIPTION:

Corrosion resistant, die cast aluminum housing. IP65 rated with silicone gasket.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
CMAQ	60 LED (Max)	2909	3000K	UNV	120-277V	WM	Wall Mount
	70MH		4000K	HLV	347-480V		
	2CFL42		5000K	TT	Tri-Tap (TT)		
				MT	Multi-Tap (MT)		
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
OPL	Opal Polycarbonate Lens	F	Front Light (Std)	ELB	Electronic HID Ballast	BL	Black
				AEL	Quartz restrike	WH	White
				MEL	Quartz restrike	SG	Silver Grey
				SF	Single Fuse	BZ	Bronze
				DM	0-10V Dimming		
						*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering


CMAQ- _____

Customization Notes:


▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.



Dimensions & Mounting (drawings are not to scale)

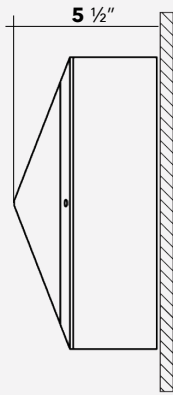


Side View

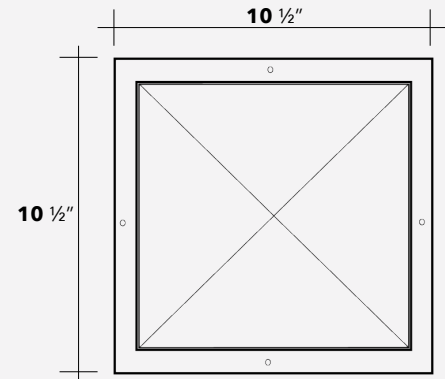

Front View

Polar Graph

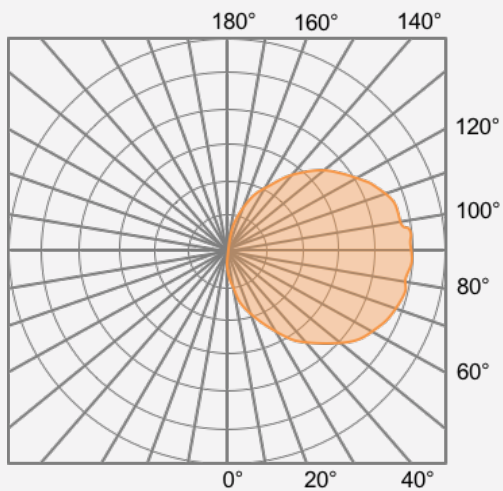

Front Light