



Date
Quote #
Project Name
Type



CSP-1 - Pendant

Description:

Exterior comprises of heavy gauge aluminum ballast housing and die-cut aluminum rings with a ribbed glass bullet lens (standard).

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
CSP-1	42W LED (Max)	5462	3000K	UNV 120-277V
	175 MH		3500K	HLV 347-480V
	42CFL		4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
WM Wall mount	RBL Ribbed glass bullet lens (Std)	EG Encompassing glow (Std)	DM 0-10V dimming	Standard
				BL Black
	RB Remote ballast/driver		WH White	
	SF Single fuse		SG Silver Grey	
	ELB Electronic ballast (HID)		BZ Bronze	
	OGB Opal glass bullet		TS Tamperproof screws	Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

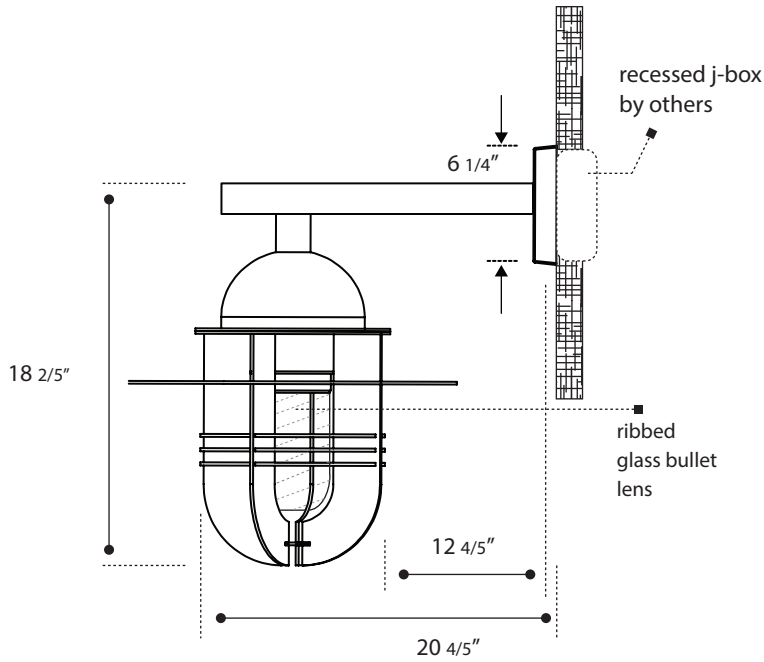

Listing:

Complies to CSA and UL standards.

Polar Graph:

