



<b>Date:</b>
<b>Type:</b>
<b>Project:</b>



**CSP - PENDANT**

**DESCRIPTION:**

Heavy gauge aluminum ballast housing. Die cut aluminum with decorative rings with ribbed cylinder and tempered glass lens.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
CSP	45W LED (Max)	5460	3000K	UNV	120-277V	A48	48" Aircraft Cable
	175 MH		4000K	HLV	347-480V	P48	48" Pendant Stem
	42 CFL		5000K	TT	Tri-Tap (HID)		
				MT	Multi-Tap (HID)		
	*Contact for other wattages	*Contact for custom	*Specify other				*Contact for other lengths

Lens		Light Pattern		Options		Finishes	
RGC	Ribbed Glass Cylinder (Std)	EG	Encompassing Glow	ELB	Electronic Ballast (HID)	BL	Black
CGB	Clear Glass Bullet			TP	Tamperproof Hardware	WH	White
OGB	Opal Glass Bullet			SF	Single Fuse	SG	Silver Grey
				DM	0-10V Dimming	BZ	Bronze
							*See finishes info on website

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering



CSP- \_\_\_\_\_

**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.



### Dimensions & Mounting (drawings are not to scale)

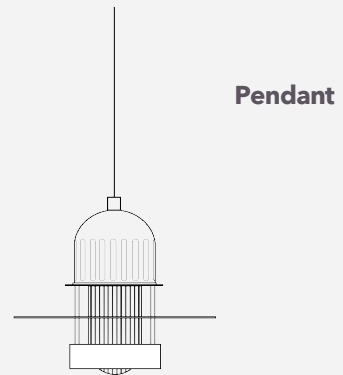

### Polar Graph

