




<b>Date:</b>
<b>Type:</b>
<b>Project:</b>

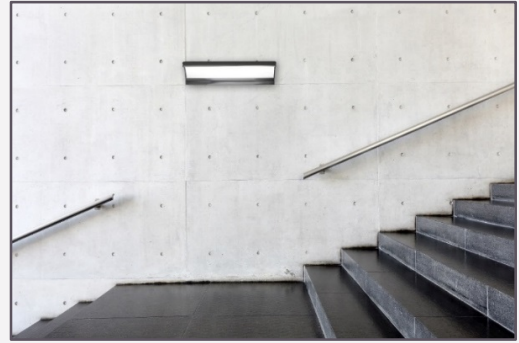

**CURVE - WALL MOUNT**

**DESCRIPTION:**

Extruded aluminum housing construction with aluminum end caps and silicone sealed lens gasketing.

Name	Lamping		Lumens ▼	Color Temp	Electrical		Mounting	
CURVE-24	24"	20 LED (Max)	2339	3000K	UNV	120-277V	WM	Wall Mount
CURVE-36	36"	30 LED (Max)	3875	4000K	HLV	347-480V		
CURVE-48	48"	40 LED (Max)	7044	5000K				
CURVE-60	60"	54 LED (Max)	8794					
CURVE-72	72"	68 LED (Max)	10555					
	*Contact for other wattages		*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
MV	Matt Velvet Lens	D	Down Light (Std)	DM	0-10V Dimming	BL	Black	
		UD	Up and Down Light	DM1	1% Dimming	WH	White	
				TP	Tamperproof Hardware	SG	Silver Grey	
				WL	Wet Location	BZ	Bronze	
				PC	Button Photocell			
				MS	Motion Sensor			
				SDMS	Step Dimming Motion Sensor			
				EM	Emergency Battery			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

▼ Lumens are for down light only

Std - Standard Offering


CURVE- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

**Customization Notes:**

\*\*\* Info on this spec sheet will change without notice as product development is an ongoing process.

### Dimensions & Mounting (drawings are not to scale)

Side View

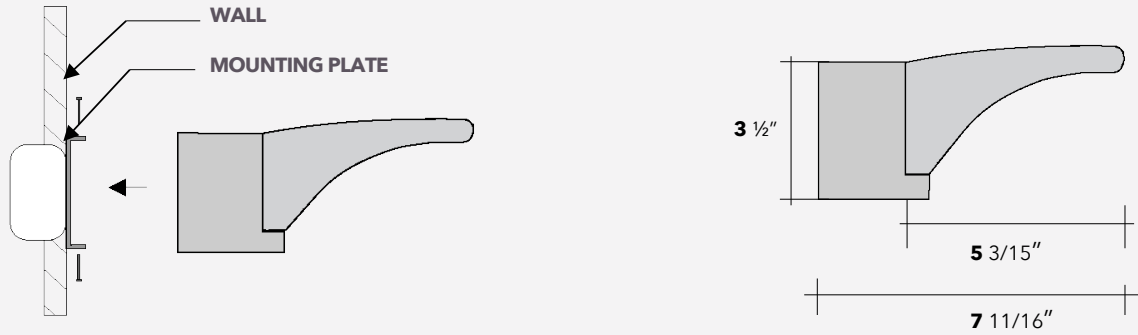


Front View




### Polar Graph

Down Light

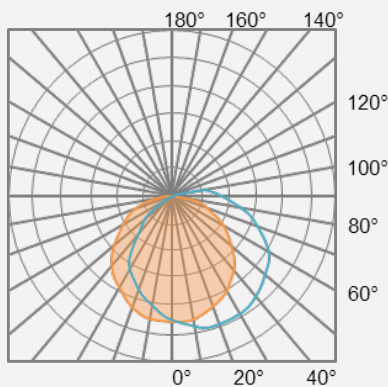

Up Light

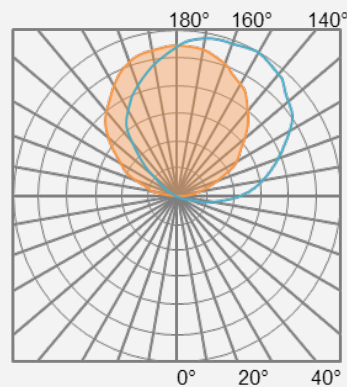

Up and Down Light

