




<b>Date:</b>
<b>Type:</b>
<b>Project:</b>

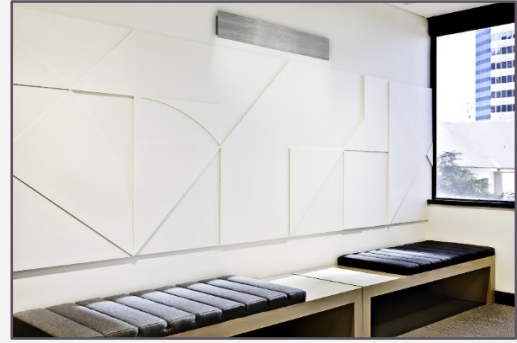

**DEL-I - WALL MOUNT**

**DESCRIPTION:**

DEL-I will add an aesthetically pleasing light effect to any high-end interior space. All external hardware is made of stainless steel.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
DEL-I-24	24"	20 LED (Max) 2XF14T5	2340	3000K	UNV	120-277V	WM	Wall Mount
DEL-I-36				4000K	HLV	347-480V		
DEL-I-48	36"	32 LED (Max) 2XF28T5	3900	5000K	TT	Tri-Tap (CFL)		
					MT	Multi-Tap (CFL)		
	48"	44 LED (Max) 2XF28T5	5460					
		*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
OAL	Opal Acrylic Lens (Std)	UD	Up and Down Light (Std)	DM	0-10V Dimming	BL	Black	
FL	Frosted Lens			EM	Emergency Battery	WH	White	
CGL	Color Glow Lens			DL	Damp Location	SG	Silver Grey	
				SF	Single Fuse	BZ	Bronze	
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering



DEL I- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

**Customization Notes:**


▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.




### Dimensions & Mounting (drawings are not to scale)




**Side View**



**Iso View**

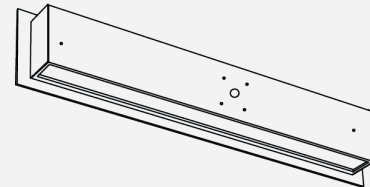

### Polar Graph

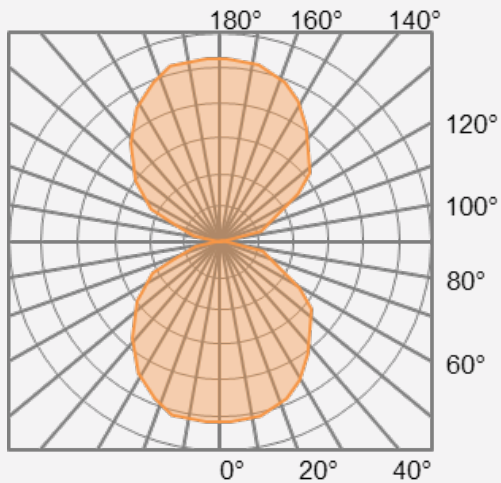

**Up and Down Light**