



Date:

Type:

Project:

**DGW - WALL MOUNT****DESCRIPTION:**

Fabricated aluminum housing construction
with silicone gasket for weather seal

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
DGW-2C	60 LED (Max) ♦	10560 (3G version)	3000K	UNV	120-277V	WM	Wall Mount
DGW-2UD	2PLT32		4000K	HLV	347-480V		
DGW-3G	27BIAX		5000K	347V	347V (PLT)		
DGW-7G							
DGW-7SPL							
DGW-4G-PERF							
DGW-PERF							
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
OAL	Opal Acrylic Lens (Std)	UDF	Up, Down & Front Light (Std)	PC	Button Photocell	BL	Black
SBL	Sand Blasted Lens	F	Front Light	DM	0-10V Dimming	WH	White
ABL	Alabaster Lens			WL	Wet location	SG	Silver Grey
						BZ	Bronze
						*See finishes info on website	

♦ Lumens are based on Max Wattage and 5000K CCT

♦ Large Size

Std - Standard Offering


DGW- - - - -

Customization Notes:

>>> Info on this spec sheet will change without notice as product development is an ongoing process.




Dimensions & Mounting (drawings are not to scale)



Side View

Front View

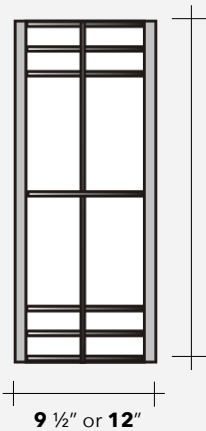

16" or 38"

9 1/2" or 12"



2C



2UD




3G



7G



7SPL




4G-PERF



PERF
(Optional)

Polar Graph

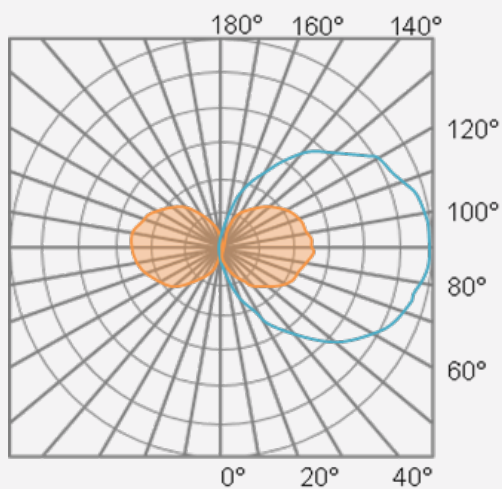

Up, Down and Front Light