



Date
Quote #
Project Name
Type



DIP - Pendant

Description:

Housing consists of a conical opal acrylic lens which connects via an aluminum stem (BA4) to the canopy . All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
DIP	42W LED (Max)	7040	2700K	UNV 120-277V
			3000K	HLV 347-480V
			3500K	
			4000K	
			5000K	
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
P36 36" pendant stem (Std)	OAL Opal acrylic lens (Std)	D Down light (Std)	DM 0-10V dimming	Only stem and canopy Standard
			DM1 1% dimming	BL Black
	RB Remote ballast/driver		WH White	
	SF Single fuse		SG Silver Grey	
	ABL Alabaster lens			BZ Bronze
				Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.

P36

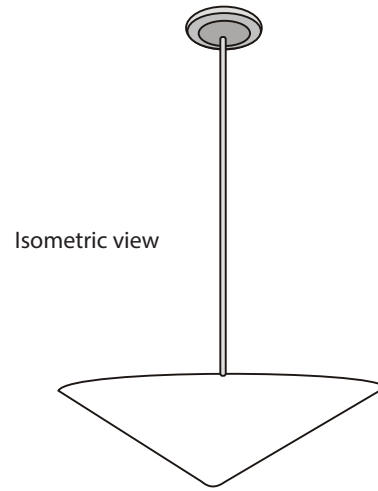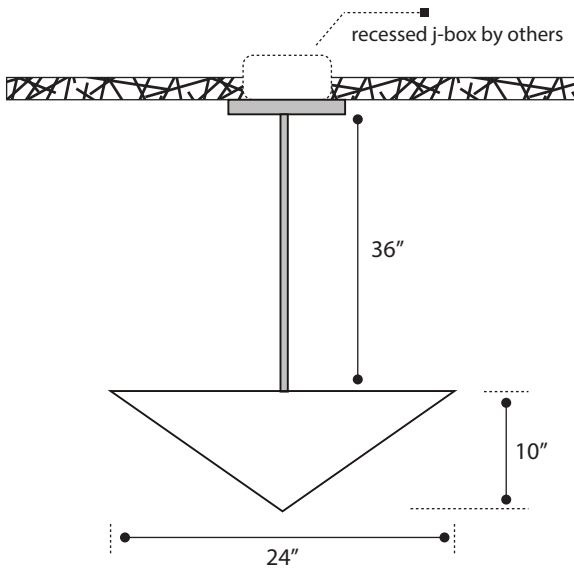

Listing:

Complies to CSA and UL standards.

Polar Graph:

