



Date
Quote #
Project Name
Type



DOMI - Wall Recessed

Description:

DOMI is constructed of cast aluminum. Compact and decorative design, ideal for low mounting areas. All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
DOMI	3W LED (Max)	352	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
R	Recessed in dry wall	CPL	Clear polycarbonate lens (Std)	FT	Forward throw	SD	Step dimming	BL	Black
						MS	Motion sensor	WH	White
RTC	Recessed in concrete	FG	Frosted glass lens			SF	Single fuse	SG	Silver Grey
						TS	Tamperproof screws	BZ	Bronze
						TP	Tamperproof hardware	See website for custom colors. Contact factory for physical samples.	
						EM	Emergency battery		
						RGBW	Programmable color changing LEDs		




- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

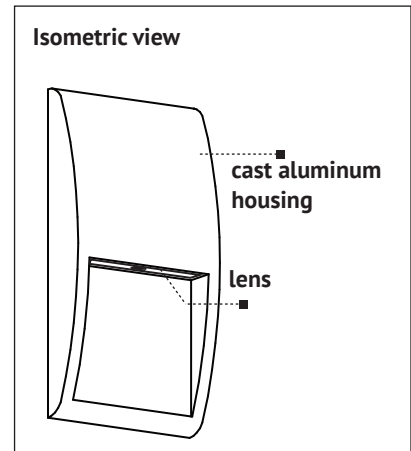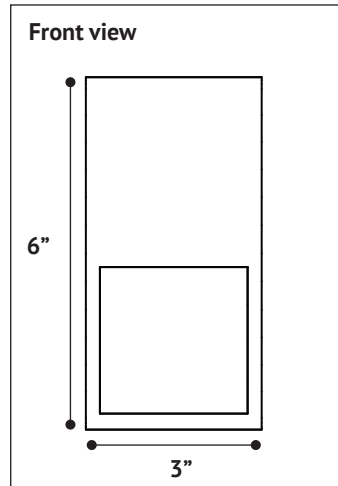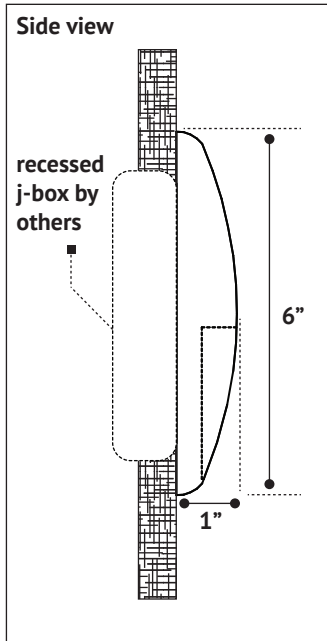

Listing:

Complies to CSA and UL standards.

Polar Graph:

