



Date
Quote #
Project Name
Type



## ERB - Post Top

### Description:

Featuring a flat disc hood and louvered optical assembly. Window above provides subtle glow of light for visual interest. All external hardware is made of stainless-steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>

Name	Light Engine	Source Lumens(LED)	Color Temp	Electrical
ERB	60W LED (Max)	7800	3000K	UNV 120-277V
	150 HPS		3500K	HLV 347-480V
	175 MH		4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
PT3	Post top slips over 3" dia pole	CG	Clear glass lens (Std)	TY5	Type V (Std)	PC	Button photocell	BL	Black
								WH	White
PT4	Post top slips over 4" dia pole	CAL	Clear acrylic lens	TY3	Type III	SF	Single fuse	SG	Silver Grey
								HCO	House side cutoff
WM	Wall mount							BZ	Bronze
								TP	Tamperproof hardware
								TS	Tamperproof screws
								DR	Decorative rings


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering



### Dimensions & Mounting:


Please note that drawings are not to scale.

Side view

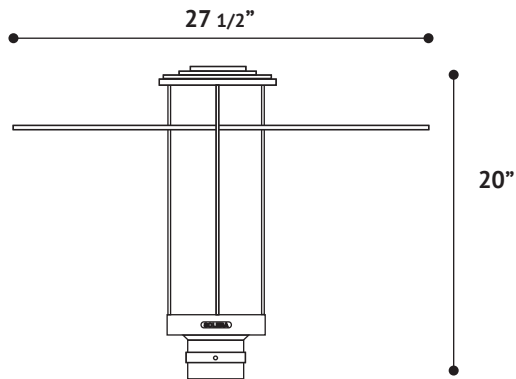


WM - wall mount


recessed  
j-box by  
others



PT3 or PT4

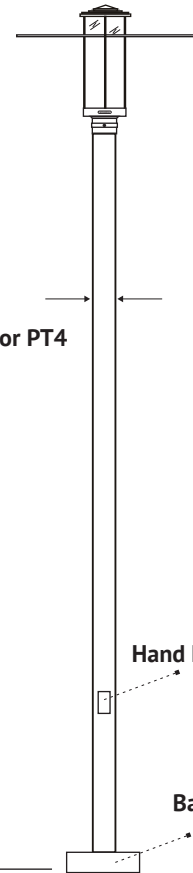

Anchoring detail

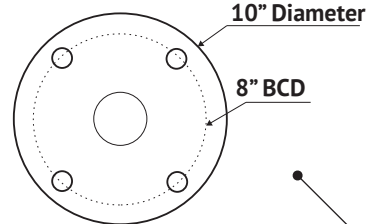

Bolt size: 3/4" X 18" X 3"

### Listing:

Complies to CSA and UL standards.

### Polar Graph:

