



Date
Quote #
Project Name
Type



ERB - Post Top

Description:

Featuring a flat disc hood and louvered optical assembly. Window above provides subtle glow of light for visual interest. All external hardware is made of stainless-steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>

Name	Light Engine	Source Lumens(LED)	Color Temp	Electrical
ERB	60W LED (Max)	7800	2700K	UNV 120-277V
	150 HPS		3000K	HLV 347-480V
	175 MH		3500K	TT Tri-Tap(HID)
			4000K	MT Multi-Tap(HID)
			5000K	

Contact for custom

Contact for custom

Contact for custom


Mounting		Lens		Light Pattern		Options		Finishes	
PT3	Post top slips over 3" dia pole	CG	Clear glass lens (Std)	TY5	Type V (Std)	PC	Button photocell	BL	Black
PT4	Post top slips over 4" dia pole	CAL	Clear acrylic lens	TY3	Type III	SF	Single fuse	WH	White
						HCO	House side cutoff	SG	Silver Grey
WM	Wall mount							BZ	Bronze
						TP	Tamperproof hardware		
						TS	Tamperproof screws		
						DR	Decorative rings		

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering



Dimensions & Mounting:

Please note that drawings are not to scale.

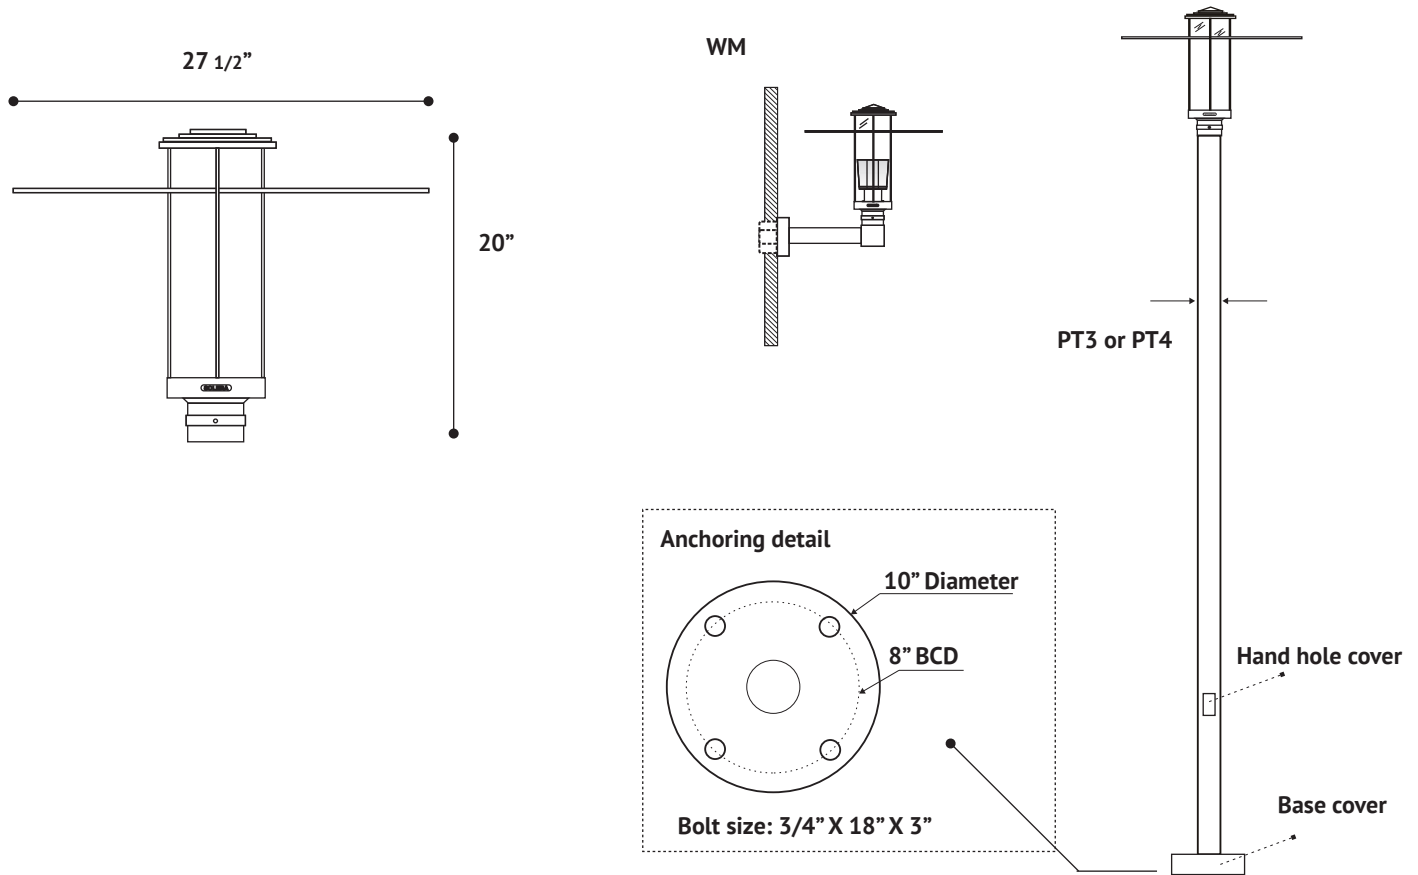

Listing:

Complies with CSA, UL; approved with label for outdoor location.



Polar Graph:

