



Date
Quote #
Project Name
Type



ERB - Post Top

Description:

Featuring a flat disc hood and louvered optical assembly. Window above provides subtle glow of light for visual interest. All external hardware is made of stainless-steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>

Name	Light Engine	Source Lumens(LED)	Color Temp	Electrical
ERB	60W LED (Max)	7800	3000K	UNV 120-277V
	150 HPS		3500K	HLV 347-480V
	175 MH		4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
PT3 Post top slips over 3" dia pole	CG Clear glass lens (Std)	TY5 Type V (Std)	PC Button photocell	BL Black
PT4 Post top slips over 4" dia pole	CAL Clear acrylic lens	TY3 Type III	SF Single fuse	WH White
			HCO House side cutoff	SG Silver Grey
WM Wall mount			TP Tamperproof hardware	BZ Bronze
			TS Tamperproof screws	CC Custom Color
			DR Decorative rings	See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering



Dimensions & Mounting:


Please note that drawings are not to scale.

Side view

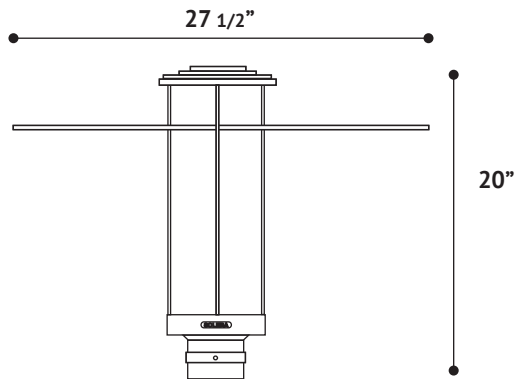


WM - wall mount


recessed
j-box by
others



PT3 or PT4

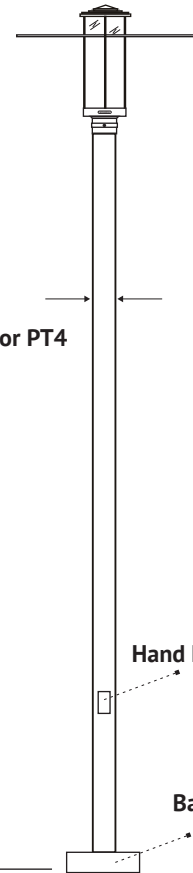

Anchoring detail

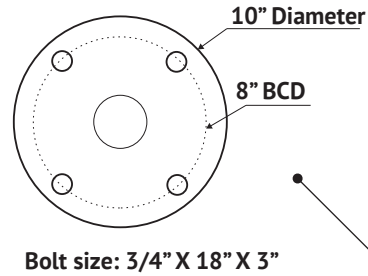

Listing:

Complies to CSA and UL standards.

Polar Graph:

