



<b>Date:</b>
<b>Type:</b>
<b>Project:</b>



**ERC - POST TOP**

**DESCRIPTION:**

Constructed from die-cast aluminum for durability, weather proof silicone gasket seal for all weather protection. All external hardware is stainless steel.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
ERC	60 LED (Max)	7800	3000K	UNV	120-277V	PT3	Post top slips inside 3" pole
	150 HPS		4000K	HLV	347-480V		
	175 MH		5000K	TT	Tri-Tap (HID)		
				MT	Multi-Tap (HID)		
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
CPL	Clear Polycarbonate Lens (Std)	TY5	Type V (Std)	TP	Tamperproof Hardware	BL	Black	
OPL	Opal Polycarbonate Lens	TY3	Type III	TS	Tamperproof Screwdriver	WH	White	
				PC	Button Photocell	SG	Silver Grey	
				SF	Single Fuse	BZ	Bronze	
				HCO	House Side Cut Off			
				FL	Flared Hood			
				OR	Outer Rings			
				DM	0-10V Dimming			
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering

ERC - \_\_\_\_\_


**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.


### Dimensions & Mounting (drawings are not to scale)



Post Top

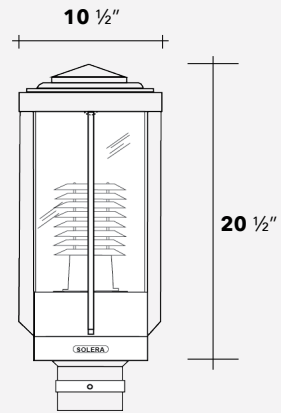

### Polar Graph

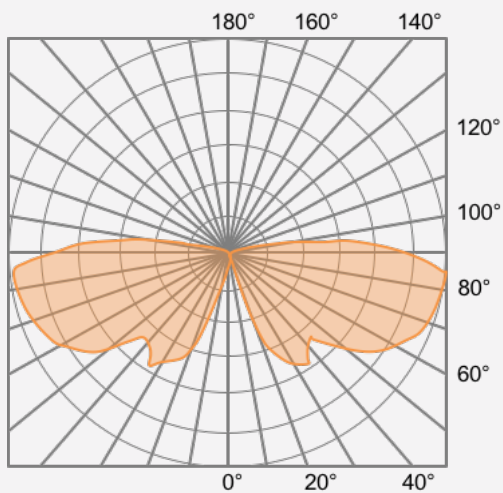

TYPE V