



Date
Quote #
Project Name
Type



EXIBRA - Wall Mount

Description:

Extruded aluminum housing with construction with aluminum end caps and a silicone sealed lens. All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
EXIBRA-S	S	70W LED (Max)	2700K	UNV 120-277V
EXIBRA-M	M	120W LED (Max)	3000K	HLV 347-480V
EXIBRA-L	L	320W LED (Max)	3500K	
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom



Mounting	Lens	Light Pattern	Options	Finishes
WM Wall mount	OPL Opal polycarbonate lens (Std)	U Up light (Std)	DM 0-10V dimming	BL Black
	CPL Clear polycarbonate lens		EM Emergency battery	WH White
	PR Prismatic Lens (K12)		TP Tamperproof hardware	SG Silver Grey
			TS Tamperproof screws	BZ Bronze
			WL Wet location	CC Custom Color
			PC Button photocell	See website for custom colors. Contact factory for physical samples.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering



Dimensions & Mounting:

Please note that drawings are not to scale.

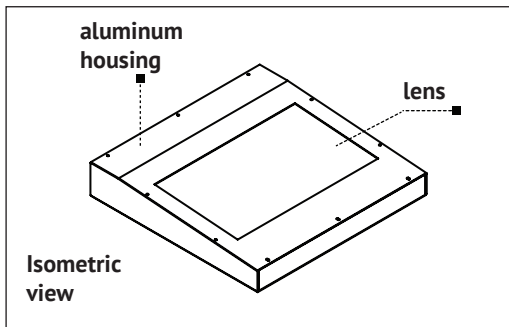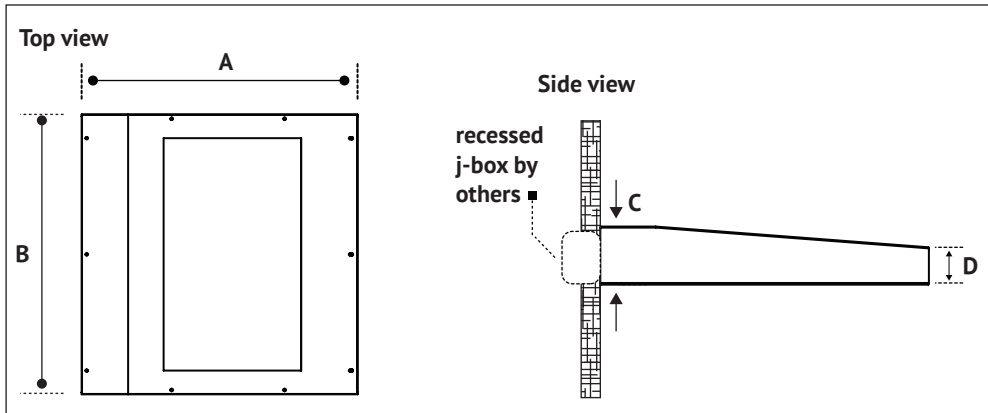

	A	B	C	D
EXIBRA-S	24"	10"	4"	2 1/2"
EXIBRA-M	24"	17"	4"	2 1/2"
EXIBRA-L	24"	24"	4"	2 1/2"

Listing:

Complies to CSA and UL standards.

Polar Graph:

