




Date
Quote #
Project Name
Type

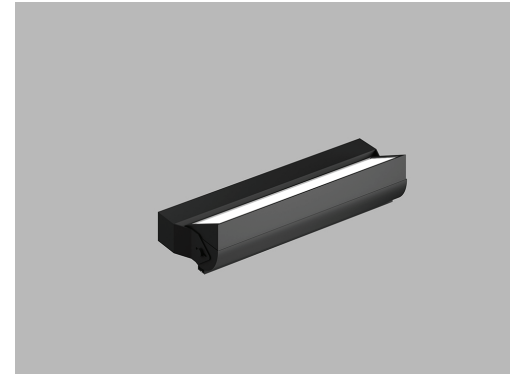

FIN - Wall Mount

Description:

Adjustable wall mount luminaire, constructed of heavy duty die cast aluminum and designed with an integrated cooling structure. Select natatorium for corrosion resistant finish.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
FIN1X	200W LED (Max)	24755	2700K	UNV 120-277V
FIN2X (Twin)	400W LED (Max)	49510	3000K	HLV 347-480V
			3500K	
			4000K	
			5000K	
	Contact for custom	Contact for custom	Contact for custom	

For better illustration on variations see {page 2}

Mounting		Lens		Light Pattern		Options		Finishes	
WM	Wall mount (FIN1X)	CG	Clear glass lens (Std)	INU	Indirect up light	DM	0-10V dimming	Standard	
								BL	Black
2AC96	2X96" aircraft cables (FIN2X)	CPL	Clear polycarbonate lens			DM1	1% dimming	WH	White
		FG	Frosted glass lens			RB	Remote ballast/driver	SG	Silver Grey
						VS	Visor cutoff	BZ	Bronze
						EM	Emergency battery	NAT	Natatorium finish
								Custom	
								CC	Custom Color
									See website for custom colors. Contact factory for physical samples.



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

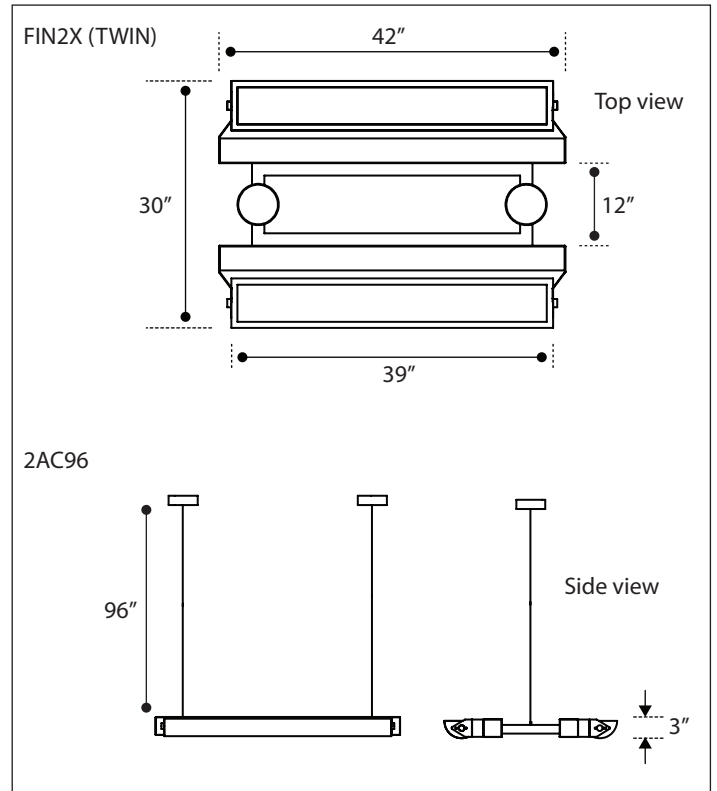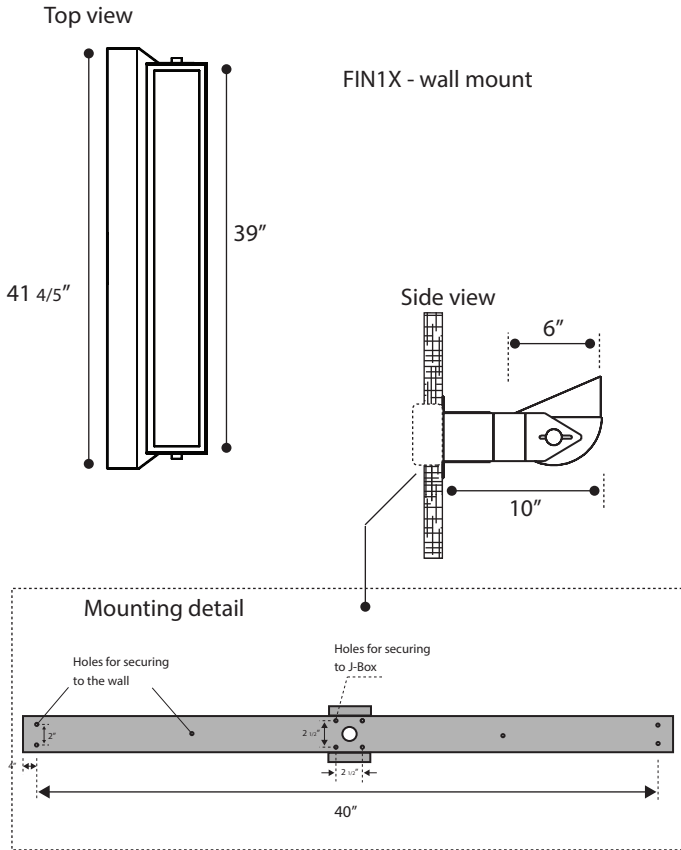

Listing:

Complies to CSA and UL standards.

Polar Graph:

