



Date:
Type:
Project:



FLU - RECESSED

DESCRIPTION:

Lens is held with an extruded aluminum door frame. Torsion springs secure the door to fixture housing. All external hardware is stainless steel.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
FLU-12	FLU-12	12 LED (Max)	2112	3000K	UNV	120-277V	R	Recessed in Solid Ceiling
FLU-24	FLU-24	24 LED (Max)	4224	4000K	HLV	347-480V	RT	Recessed in T-Bar
FLU-36	FLU-36	36 LED (Max)	6336	5000K	TT	Tri-Tap (HID)		
FLU-48	FLU-48	48 LED (Max)	8448		MT	Multi-Tap (HID)		
FLU-60	FLU-60	60 LED (Max)	10560					
FLU-72	FLU-72	72 LED (Max)	12672					
	*Contact for other wattages		*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes		
FOAL	Flat Opal Acrylic Lens	D	Down Light	DM	0-10V Dimming	BL	Black	
COAL	Concave Opal Acrylic Lens			DM1	1% Dimming	WH	White	
CXAL	Convex Opal Acrylic Lens					SG	Silver Gray	
						BZ	Bronze	
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

FLU- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____


Customization Notes:

➤➤➤ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

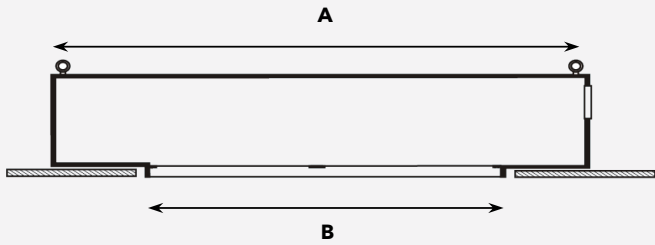

Recessed in T-BAR



Recessed in Solid Ceiling




Convex Opal Acrylic Lens



Concave Opal Acrylic Lens



Flat Opal Acrylic Lens



FLU	A	B
FLU-12	12"	11 1/2"
FLU-18	18"	17 1/2"
FLU-24	24"	23 1/2"
FLU-36	36"	35"
FLU-48	48"	46 3/4"
FLU-60	60"	58 3/4"
FLU-72	72"	70 3/4"

Polar Graph

