



Date
Quote #
Project Name
Type



GAR-B - Bollard

Description:

Extruded aluminum housing construction with aluminum end caps and silicone sealed lens gasketing.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
	-	-	-	-	-	-	-	-	-

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GAR-B	42 LED (Max)	5460	3000K	UNV 120-277V
	70 HPS		3500K	HLV 347-480V
	70 MH		4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)
	PLT42			

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchors, bolts and template	CG	Clear glass lens (Std)	FT	Forward throw	TP	Tamperproof hardware	BL	Black
		PR	Prismatic lens (K12)	180	180 degrees	TS	Tamperproof screws	WH	White
		LE	Lexan (vandal resistant)			PC	Button photocell	SG	Silver Grey
						SF	Single fuse	BZ	Bronze
						GFR	Ground fault receptacle	CC	Custom Color
						ELB	Electronic HID ballast		See website for custom colors. Contact factory for physical samples.
						BC	Base cover		

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.


Side view

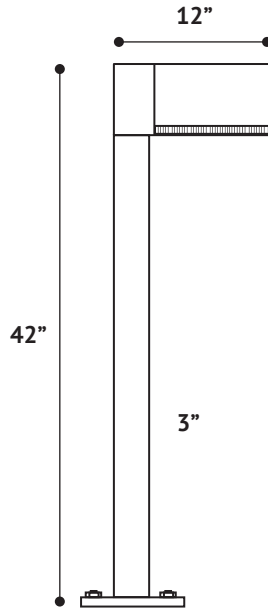

Front view

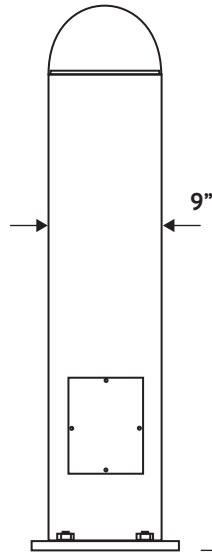

Anchoring detail



BOLT SIZE: 1/2" X 12" X 1 3/8"

Listing:

Complies to CSA and UL standards.

Polar Graph:

FT

