



Date
Quote #
Project Name
Type



GAR-B - Bollard

Description:

Extruded aluminum housing construction with aluminum end caps and silicone sealed lens gasketing.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GAR-B	42 LED (Max)	5460	3000K	UNV 120-277V
	70 HPS		3500K	HLV 347-480V
	70 MH		4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)
	PLT42			
Contact for custom		Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
ABT Anchors, bolts and template	CG Clear glass lens (Std)	FT Forward throw	MS Motion sensor	BL Black
	PR Prismatic lens (K12)	180 180 degrees	SD Step dimming	WH White
	LE Lexan (vandal resistant)		TP Tamperproof hardware	SG Silver Grey
			TS Tamperproof screws	BZ Bronze
			PC Button photocell	CC Custom Color
			SF Single fuse	See website for custom colors. Contact factory for physical samples.
			GFR Ground fault receptacle	
			ELB Electronic HID ballast	
			BC Base cover	

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.


Side view

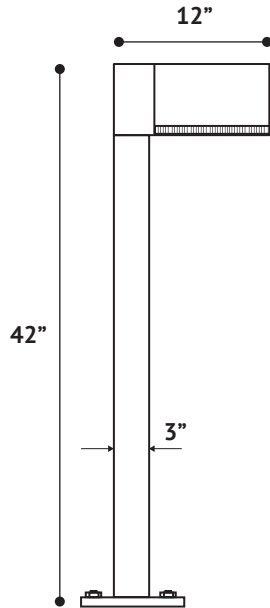

Front view

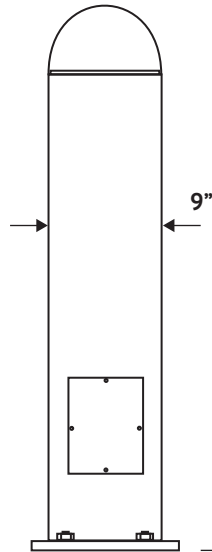

Anchoring detail



BOLT SIZE: 1/2" X 12" X 1 3/8"

Listing:

Complies to CSA and UL standards.

Polar Graph:

FT

