

<b>Date:</b>
<b>Type:</b>
<b>Project:</b>



**GAR-B - BOLLARD**

**DESCRIPTION:**

Extruded aluminum housing construction with aluminum end caps and silicone sealed lens gasketing.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
GAR-B	42 LED (Max)	5460	3000K	UNV	120-277V	ABT	Anchor, Bolts & Template
	70HPS		4000K	HLV	347-480V		
	70MH		5000K	TT	Tri-Tap (HID, CFL)		
	PLT42			MT	Multi-Tap (HID, CFL)		
	*Contact Solera for other Wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
CL	Clear Glass Lens (Std)	FT	Forward Throw (Std)	TP	Tamperproof Hardware	BL	Black
PR	Prismatic Lens (K12)			TS	Tamperproof Screwdriver	WH	White
LE	Lexan (Q)			PC	Button Photocell	SG	Silver Grey
FG	Frosted Glass Lens			SF	Single Fuse	BZ	Bronze
				GFR	Ground Fault Receptacle		
				ELB	Electronic HID Ballast		
				BC	Base Cover		
				HCO	House Side Cutoff		
						*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Q Vandal Resistant


Std - Standard Offering

GAR-B - \_\_\_\_\_


**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

**Dimensions & Mounting** (drawings are not to scale)

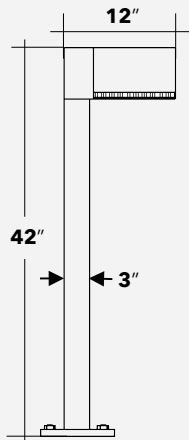


Side View

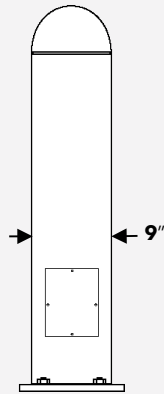

Front View

**Anchoring Detail**



BOLT SIZE: 1/2" X 12" X 1 3/8"

**Polar Graph**

