




<b>Date:</b>
<b>Type:</b>
<b>Project:</b>

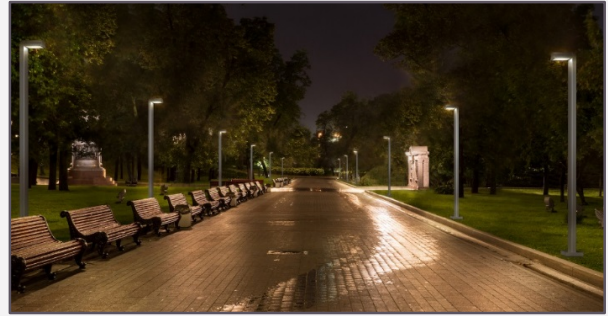

**GAR-C - LIGHT COLUMN**

**DESCRIPTION:**

Column is made with aluminum (6061-T6 low copper). Silicone sealed lens for weather tight protection.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
GAR-C	42W LED (Max)	5460	3000K	UNV	120-277V	ABT	Anchor, Bolts & Template
	150 MH		4000K	HLV	347-480V		
			5000K	TT	Tri-Tap(HID)		
				MT	Multi-Tap (HID)		
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
CG	Clear Glass Lens (Std)	FT	Forward Throw	TP	Tamperproof Hardware	BL	Black
PG	Prismatic Glass Lens			TS	Tamperproof Screwdriver	WH	White
LE	Lexan (Ⓢ)			PC	Button Photocell	SG	Silver Grey
OAL	Opal Acrylic Lens			SF	Single Fuse	BZ	Bronze
				GFR	Ground Fault Receptacle		
				HCO	House Side Cutoff		
							*See finishes info on website

✦ Lumens are based on Max Wattage and 5000K CCT

Ⓢ Vandal Resistant

Std- Standard Offering

GAR-C- \_\_\_\_\_


**Customization Notes:**

\*\*\* Info on this spec sheet will change without notice as product development is an ongoing process.




### Dimensions & Mounting (drawings are not to scale)


Side View

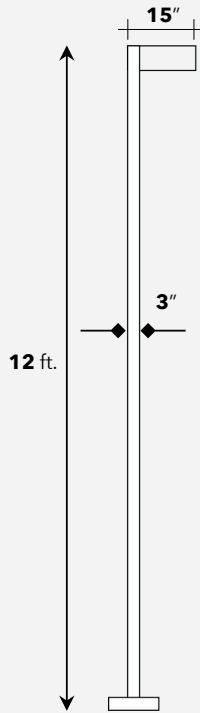


Front View

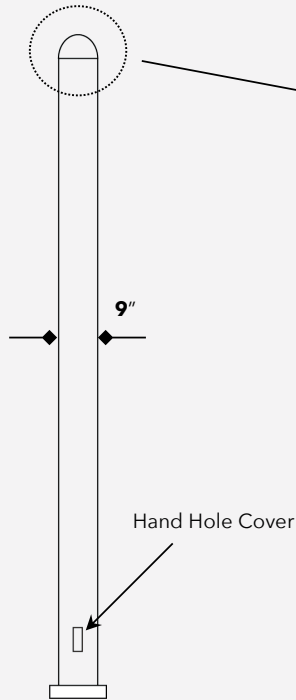


Head dimensions



Anchoring Plate/ Base



### Polar Graph

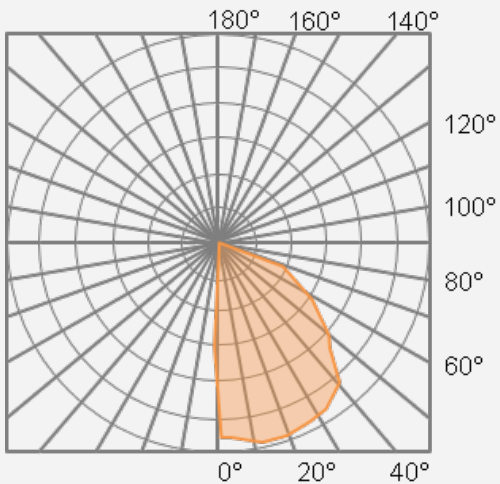

Forward Throw