

Date:
Type:
Project:



GLOW RING - PENDANT

DESCRIPTION:

Glow Ring is a circular pendant luminaire that consists of two distinct pieces: the aluminum plate on top and opal lens on the bottom. All external hardware is stainless steel.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
GLOW RING-18	18"	18 LED (Max)	3168	3000K	UNV	120-277V	3AC48-CMB	3X48" Aircraft cables with individual canopies
GLOW RING-24	24"	24 LED (Max)	4224	4000K	HLV	347-480V	3AC48-SPD	Aircraft cable spider mount with 3 connecting to hub
GLOW RING-36	36"	36 LED (Max)	6336	5000K			3AC48-TR	3 Aircraft cables converge to single canopy
GLOW RING-48	48"	48 LED (Max)	8448				3AC48-SPD-P	Combination of aircraft cables and stem
GLOW RING-60	60"	60 LED (Max)	10560					
GLOW RING-72	72"	72 LED (Max)	12672					
	*Contact for other wattages		*Contact for custom	*Specify other				*Contact for other lengths

Lens		Light Pattern		Options		Finishes		
OAL	Opal Acrylic Lens (Std)	D	Down Light (Std)	DM	0-10V Dimming	BL	Black	
ALB	Alabaster Lens	UP	Up Light	DM1	1% Dimming	WH	White	
		UD	Up and Down Light (Indicates %)	EM	Emergency Battery	SG	Silver Grey	
						BZ	Bronze	
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

GLOW RING - _____


Customization Notes:

*** Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

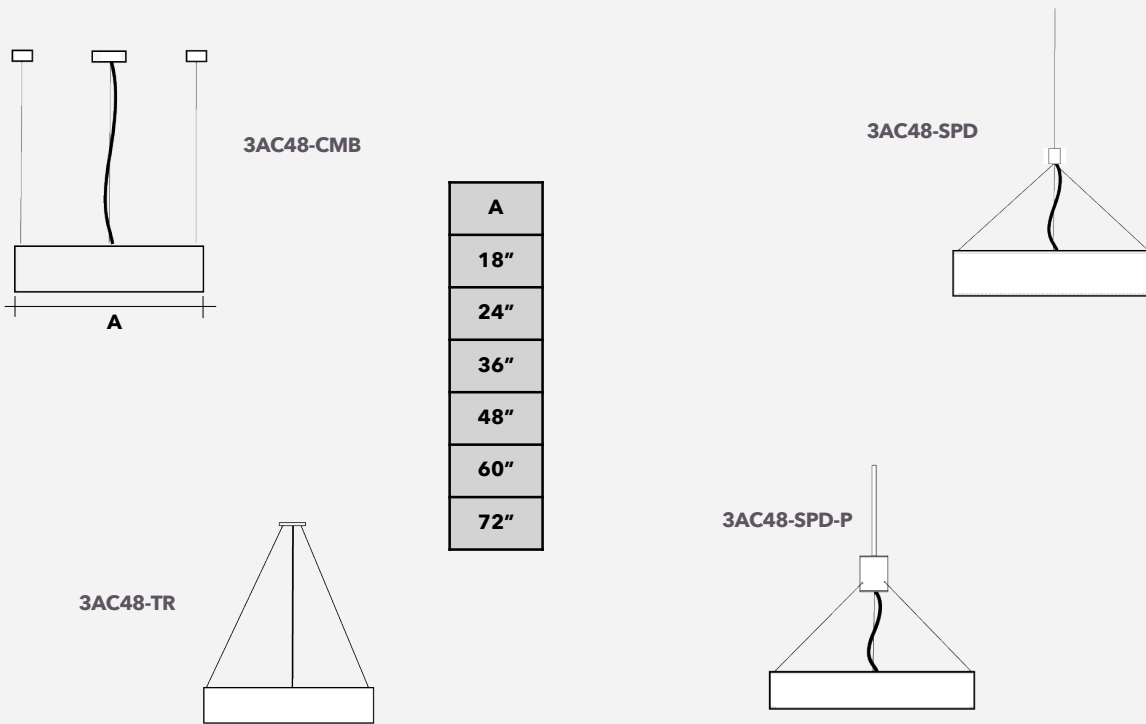

Polar Graph

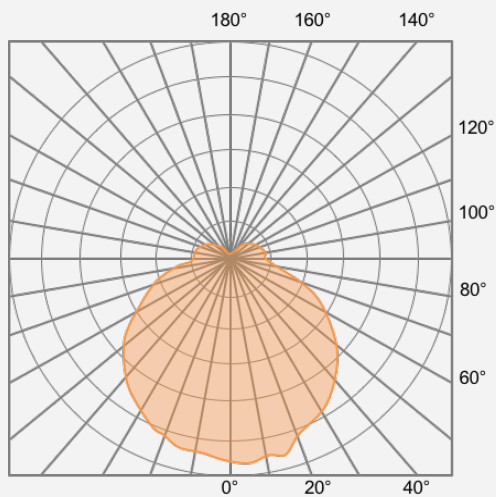

Down Light