



Date
Quote #
Project Name
Type



GM-Bollard

Description:

The GM-Bollard is suitable for use in entrance ways and can be customized to include provisions for intercom, card reader and handi cap button. Solera only provides the cut out: specs for intercom, card reader and handi cap button by others.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GM-Bollard	20 LED (Max)	2694	2700K	UNV 120-277V
			3000K	HLV 347-480V
			3500K	
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchors, bolts and template	CPL	Clear polycarbonate lens(Std)	D	Down light	COM	Intercom	BL	Black
						HPB	Handicap push button	WH	White
						CR	Card reader	SG	Silver Grey
								BZ	Bronze


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

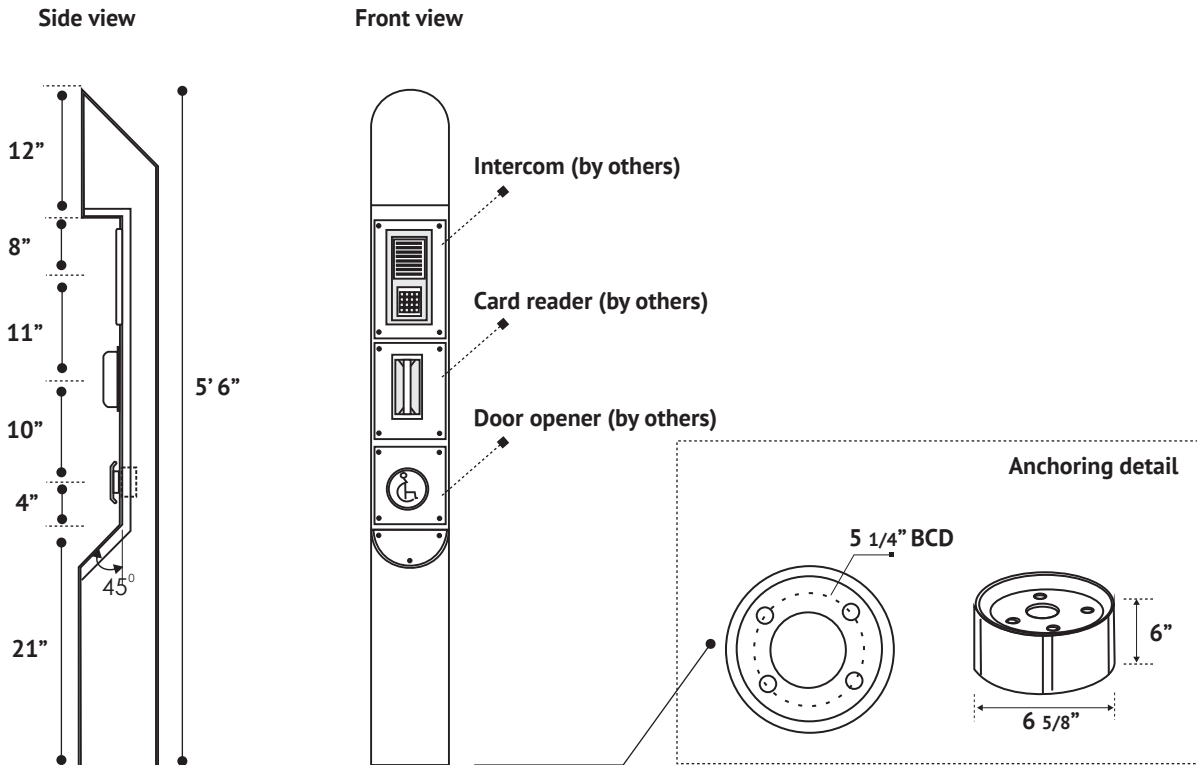

Listing:

Complies with CSA, UL; approved with label for outdoor location.

Polar Graph:

