



Date
Quote #
Project Name
Type



GM-Bollard

Description:

The GM-Bollard is suitable for use in entrance ways and can be customized to include provisions for intercom, card reader and handi cap button. Solera only provides the cut out: specs for intercom, card reader and handi cap button by others.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GM-Bollard	20 LED (Max)	2694	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchors, bolts and template	CPL	Clear polycarbonate lens (Std)	D	Down light	MS	Motion sensor	BL	Black
						SD	Step dimming	WH	White
								SG	Silver Grey
						COM	Intercom (cut out only)	BZ	Bronze
						HPB	Handicap push button (cut out only)	CC	Custom Color
						CR	Card reader (cut out only)		See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

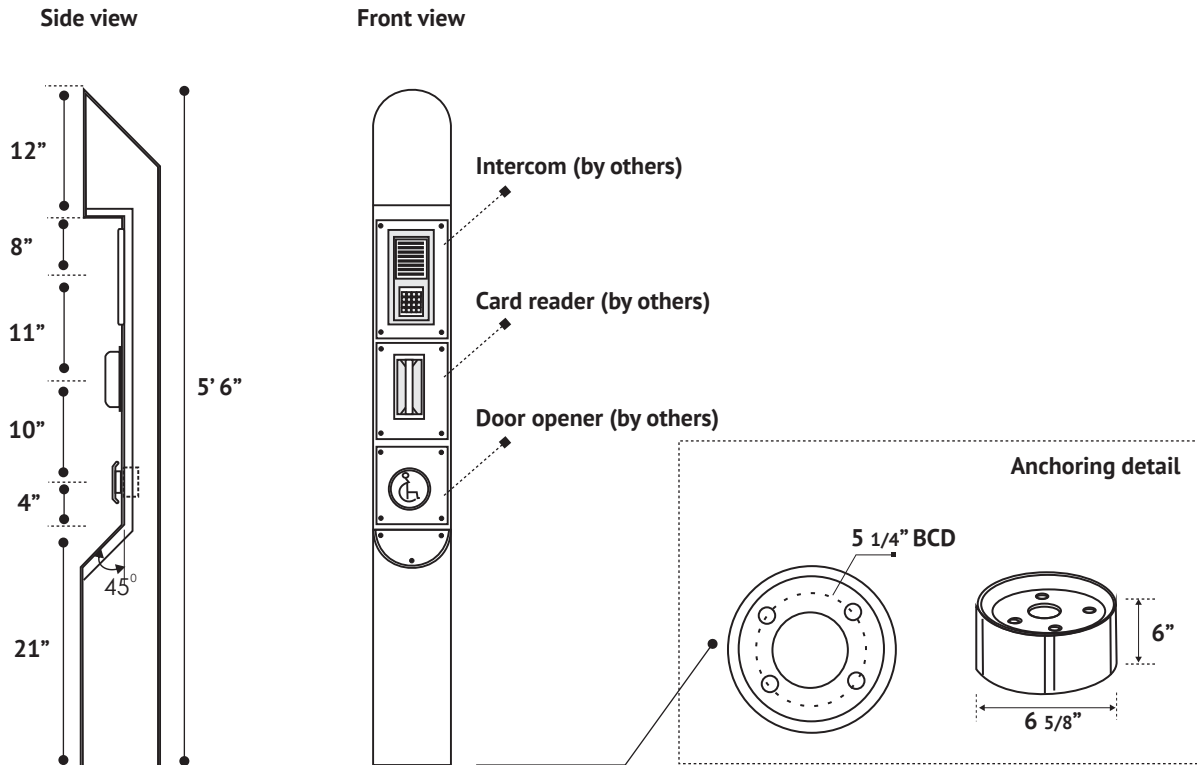

Listing:

Complies to CSA and UL standards.

Polar Graph:

