



Date:
Type:
Project:



ICON - BOLLARD

DESCRIPTION:

Top cap is one piece concrete and removes for lamp/ballast maintenance.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
ICON	48 LED (Max)	6240	3000K	UNV	120-277V	ABT	Anchor, Bolts and Template
	100MH		4000K	HLV	347-480V		
	100HPS		5000K	TT	Tri-Tap (HID, CFL)		
	18LPS			MT	Multi-Tap (HID, CFL)		
	2PLT42						
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
OAL	Opal Acrylic Lens (Std)	TY5	Type V (Std)	TP	Tamperproof Hardware	NG	Natural Grey
CAL	Clear Acrylic Lens	TY3	Type III	TS	Tamperproof Screwdriver	CA	Other concrete aggregates available
		ASM	180 Asymmetric	PC	Button Photocell		
				SF	Single Fuse		
				GFR	Ground Fault Receptacle		
				ELB	Electronic HID Ballast		
				HCO	House Side Cutoff		
						*See finishes info on website	

❖ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering


ICON - _____

Customization Notes:


➤➤➤ Info on this spec sheet will change without notice as product development is an ongoing process.



Dimensions & Mounting (drawings are not to scale)

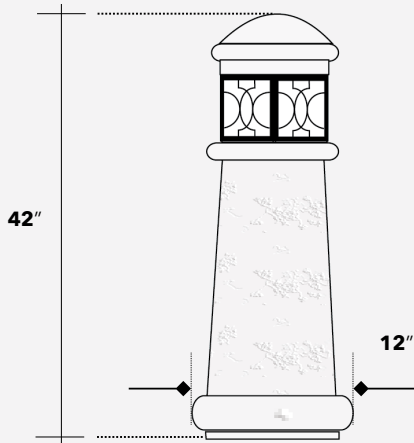

Anchoring Detail



Polar Graph

