



Date:

Type:

Project:



LLA - RECESSED

DESCRIPTION:

Corrosion resistant die-cast aluminum housing with cast aluminum door frame and silicone gasket. All external hardware is stainless steel.

Name	Lamping	Lumens	Color Temp	Electrical		Mounting	
LLA	48 LED (Max)	7357	3000K	UNV	120-277V	RTC	Recessed in concrete
	70HPS		4000K	HLV	347-480V	R	Recessed in dry wall
	70MH		5000K	TT	Tri-Tap (HID)	WM	Wall Mount (Available)
	CFL42			MT	Multi-Tap (HID)		
	*Contact for other wattages	*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
LPL	Linear Prismatic Lens	FT	Forward Throw (Std)	TP	Tamperproof Hardware	BL	Black
FG	Frosted Glass Lens			PC	Button Photocell	WH	White
				SF	Single Fuse	SG	Silver Grey
				WG	Wire Guard	BZ	Bronze
						*See finishes brochure for custom	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering




LLA- - - - -

Customization Notes:

►►► Info on this spec sheet will change without notice as product development is an ongoing process.




Dimensions & Mounting (drawings are not to scale)

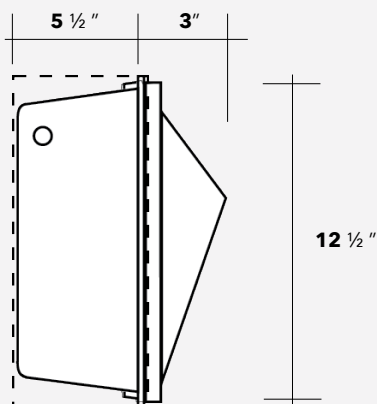

Wall Mount

Polar Graph

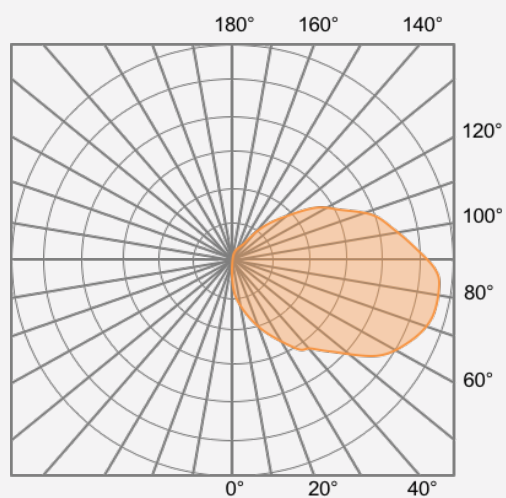

Forward Throw