



| |
|--------------|
| Date |
| Quote # |
| Project Name |
| Type |



LRA - Wall Recessed

Description:

LRA is designed for step light applications. Made of fabricated aluminum and contains a tempered glass lens which is silicone sealed for weatherproofing.

| | | | | | | | | | |
|----------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Name | Engine | Lumens | CCT | Electrical | Mounting | Lens | Pattern | Options | Finish |
| <input type="text"/> | - <input type="text"/> | - <input type="text"/> | - <input type="text"/> | - <input type="text"/> | - <input type="text"/> | - <input type="text"/> | - <input type="text"/> | - <input type="text"/> | - <input type="text"/> |

| Name | Light Engine | Source Lumens _{(LED)(5000K)} | Color Temp | Electrical |
|------|---------------|---------------------------------------|------------|-------------------|
| LRA | 12W LED (Max) | 2100 | 3000K | UNV 120-277V |
| | 70 MH | | 3500K | HLV 347-480V |
| | 70 HPS | | 4000K | TT Tri-Tap(HID) |
| | | | 5000K | MT Multi-Tap(HID) |

Contact for custom

Contact for custom

Contact for custom

| Mounting | Lens | Light Pattern | Options | Finishes |
|--------------------------|------------------------------|------------------|-------------------------|----------------|
| R Recessed in dry wall | CG Clear glass lens (Std) | FT Forward throw | TP Tamperproof hardware | BL Black |
| RTC Recessed in concrete | CPL Clear polycarbonate lens | | TS Tamperproof screws | WH White |
| | | | EM Emergency battery | SG Silver Grey |
| | OPL Opal polycarbonate lens | | WL Wet location | BZ Bronze |
| | | | SF Single fuse | |


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






Dimensions & Mounting:

Please note that drawings are not to scale.

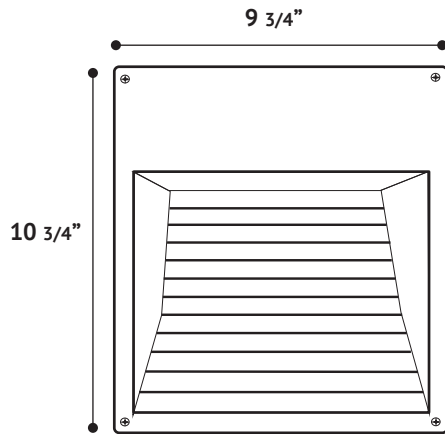

Front view

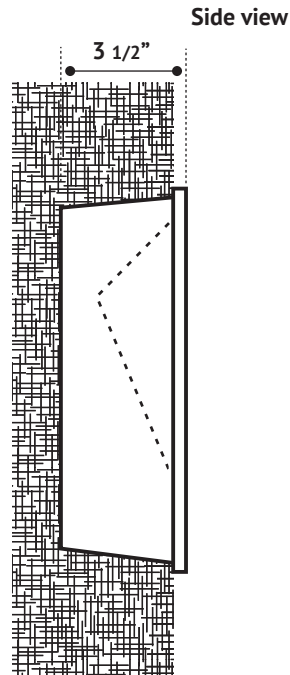

Side view

Listing:

Complies to CSA and UL standards.

Polar Graph:

