

Date:
Type:
Project:



MAS - PENDANT

DESCRIPTION:

MAS is a compact rectilinear pendant that is ideal for small spaces. It starts at 2' and goes up by 2 foot increments to 8'. Option to specify with an up light.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
MAS-2'	2'	12 LED (Max)	2112	3000K	UNV	120-277V	2AC24	2 X 24" aircraft cables
MAS-4'	4'	18 LED (Max)	3168	4000K	HLV	347-480V		
MAS-6'	6'	36 LED (Max)	6336	5000K				
MAS-8'	8'	60 LED (Max)	10560					
	*Contact for other wattages		*Contact for custom	*Specify other			*Contact for other lengths	

Lens		Light Pattern		Options		Finishes	
PR	Prismatic Lens (K12)	D	Down Light (Std)	DM	0-10V Dimming	BL	Black
OAL	Opal Acrylic Lens	UD	Up Light and Down Light	DM1	1% Dimming	WH	White
						SG	Silver Grey
						BZ	Bronze
						*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering



MAS- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

Customization Notes:


➤➤➤ Info on this spec sheet will change without notice as product development is an ongoing process.



Dimensions & Mounting (drawings are not to scale)

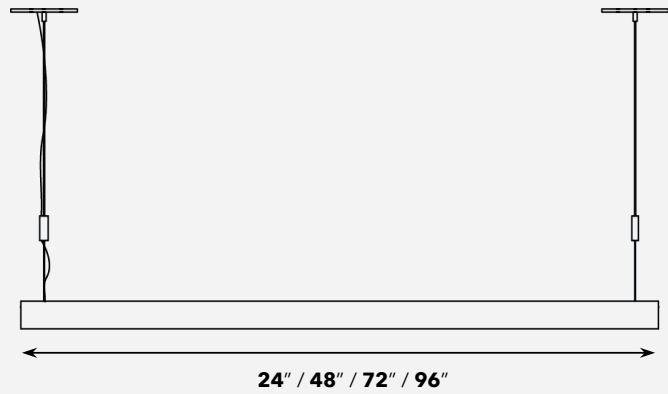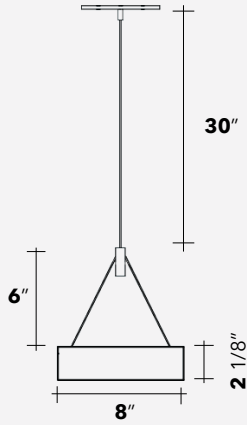

Polar Graph

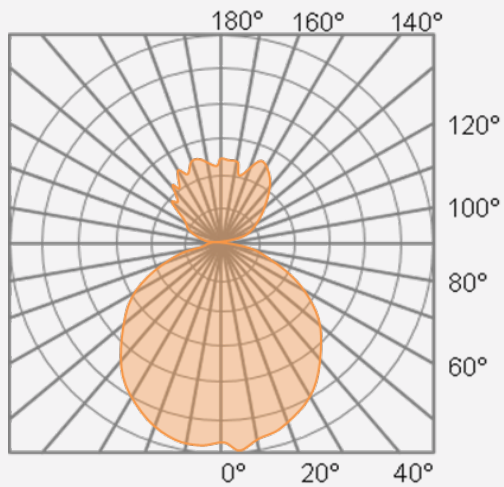

Up & Down Light