




Date
Quote #
Project Name
Type

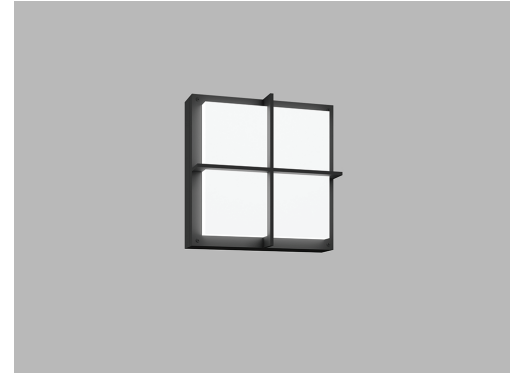

QMRT- Wall Mount

Description:

Die cast aluminum housing with cross bar design. All external hardware is stainless-steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
QMRT	42W LED (Max)	5460	3000K	UNV 120-277V
	70 MH		3500K	HLV 347-480V
	2CFL42	4000K	TT Tri-Tap(HID)	
		5000K	MT Multi-Tap(HID)	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
WM Wall mount	OPL Opal polycarbonate lens (Std)	F Front light	PC Button photocell	Standard
			SF Single fuse	BL Black
			TP Tamperproof hardware	WH White
			TS Tamperproof screws	SG Silver Grey
			WL Wet location	BZ Bronze
			DM 0-10V dimming	Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.

Front view

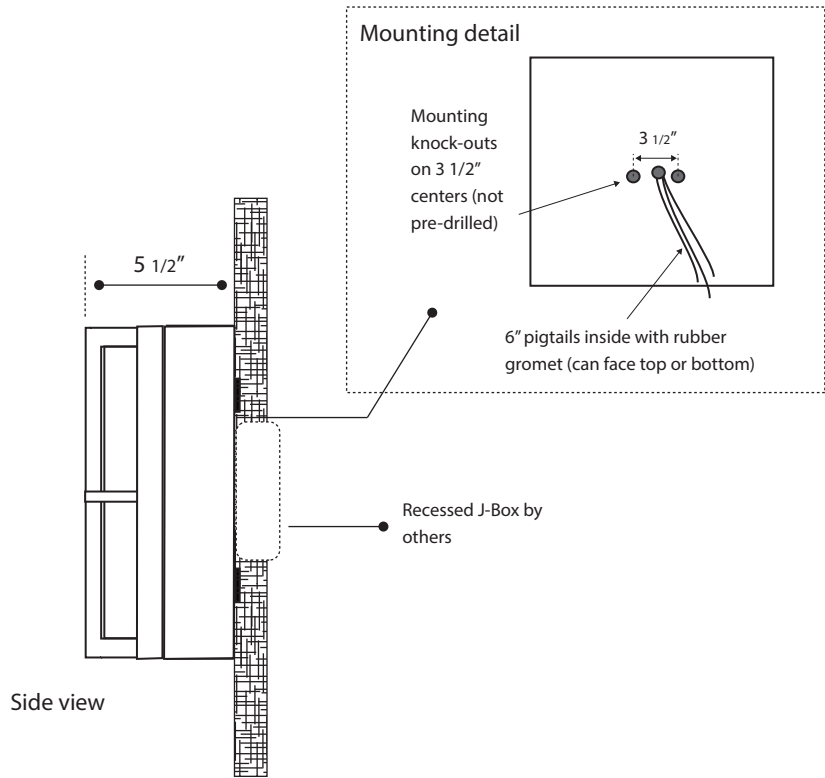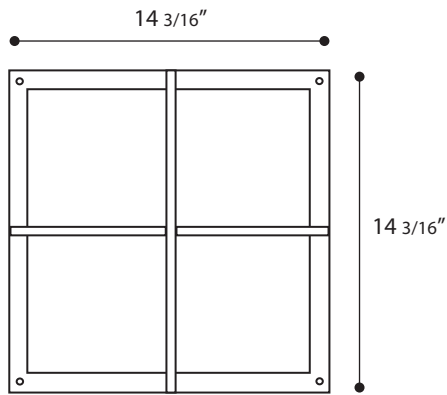

Listing:

Complies to CSA and UL standards.

Polar Graph:

