



Date:
Type:
Project:



QUAD - LIGHT COLUMN

DESCRIPTION:

Heavy duty extruded aluminum (6061-T6 Alum) housing construction with clear acrylic lens.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
	QUAD-6	Q-10-6			36 LED (Max)	6336	3000K	UNV
QUAD-8	Q-16-6	60 LED (Max)	10560	4000K	HLV	347-480V		
	Q-10-8	48 LED (Max)	8448	5000K				
	Q-16-8	72 LED (Max)	12672					
	*Contact for other wattages		*Contact for custom	*Specify other				

Lens		Light Pattern		Options		Finishes	
OAL	Opal Acrylic Lens	4W	Four Windows	COM	Entercom	BL	Black
		3W	Three Windows	USB	USB Charger	WH	White
		2W	Two Windows	EM	Emergency Battery	SG	Silver Grey
		1W	One Window	WL	Wet Location	BZ	Bronze
				SF	Single Fuse		
				PC	Button Style Photocell		
				TP	Tamperproof Hardware		
				HCO	House Side Cutoff		
						*See finishes brochure for custom	

❖ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering


QUAD - _ _ _ _ _

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.




Dimensions & Mounting (drawings are not to scale)

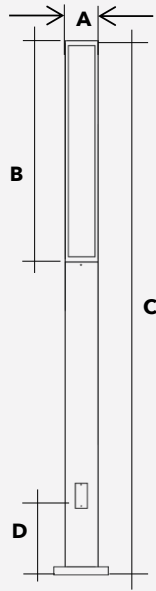

	A	B	C	D
QUAD-10	6" / 8"	48"	120"	24"
QUAD-16	6" / 8"	72"	196"	24"

Polar Graph

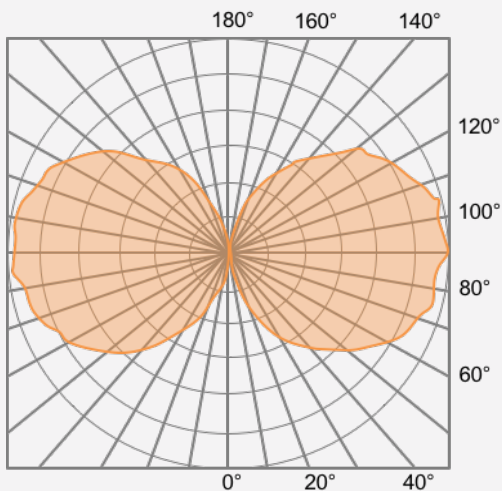

Type V