



Date
Quote #
Project Name
Type



QUAD-O - Light Column

Description:

Heavy duty extruded aluminum housing construction with an opal acrylic lens. Choose between a 6X6 or 8X8 square, and standard heights are 10 or 16 feet. Custom sizes available: contact factory.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>

Name	Light Engine		Source Lumens(LED)	Color Temp	Electrical
QUAD-O-6	6-10	36 LED (Max)	6336	3000K	UNV 120-277V
	6-16	60 LED (Max)	10560	3500K	HLV 347-480V
QUAD-O-8	8-10	48 LED (Max)	8448	4000K	
	8-16	72 LED (Max)	12672	5000K	
Contact for custom		Contact for custom		Contact for custom	

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts and template	OAL	Opal acrylic lens	TY5	Type V (Std)	EM	Emergency battery	BL	Black
						TP	Tamperproof hardware	WH	White
						TS	Tamperproof screws	SG	Silver Grey
						WL	Wet location	BZ	Bronze
						PC	Button photocell	CC	Custom Color
						GFR	Ground fault receptacle		See website for custom colors. Contact factory for physical samples.
						COM	Intercom		
						SF	Single fuse		

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering








Dimensions & Mounting:

Please note that drawings are not to scale.

Side view

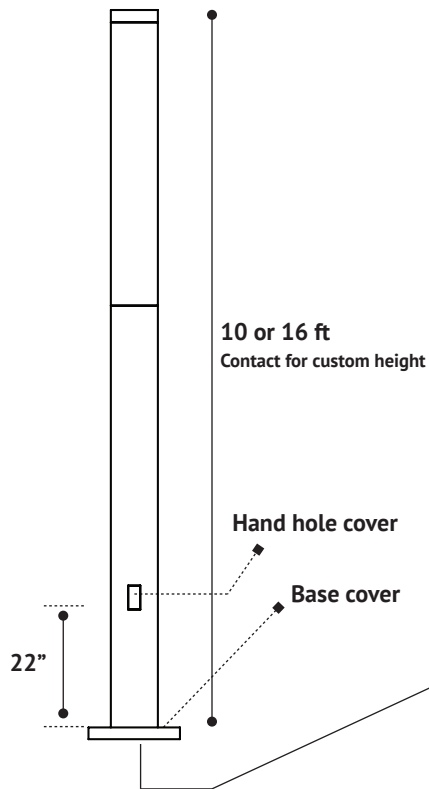

Top view

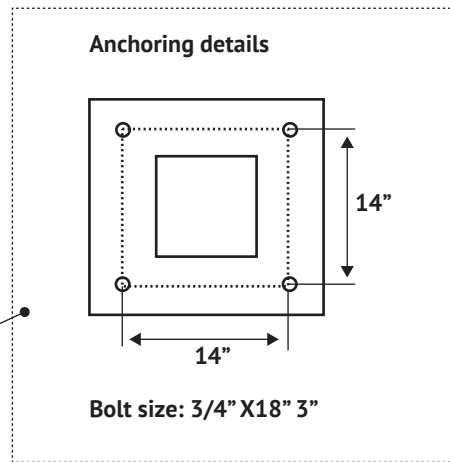

Listing:

Complies to CSA and UL standards.

Polar Graph:

