



Date
Quote #
Project Name
Type



RLA - Wall Mount

Description:

RLA is ideal for adding accent lighting to building exteriors. Bullet lens is standard. All external hardware is stainless-steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>	- <input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
RLA-9	9	14W LED (Max)	2106	2700K UNV 120-277V
RLA-12	12	20W LED (Max)	2814	3000K HLV 347-480V 3500K 4000K 5000K

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
E2B E2 bracket arm	CGB Clear bullet lens (Std)	D Down light	SF Single fuse	BL Black
	PGB Prismatic bullet lens		WL Wet location	WH White
			WG Wire guard	SG Silver Grey
				BZ Bronze


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

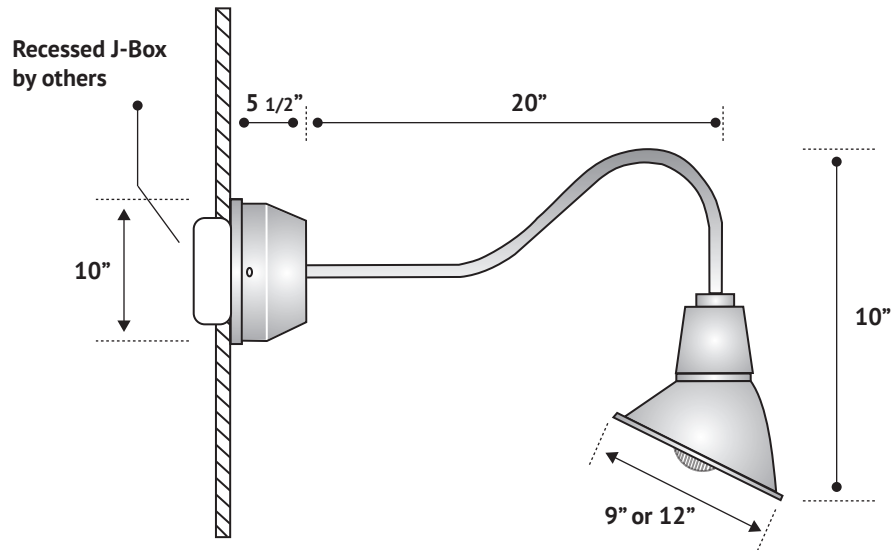

Listing:

Complies with CSA, UL; approved with label for outdoor location.



Polar Graph:

