



**Date:**

**Type:**

**Project:**



**RLM - PENDANT**

**DESCRIPTION:**

Spun aluminum housing construction. All external hardware is stainless steel.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
RLM	13"	20W LED (Max)	2578	3000K	UNV	120-277V	AC18	18" aircraft cable
	16"	30W LED (Max)	3912	4000K	HLV	347-480V	P18	18" pendant stem
	18"	40W LED (Max)	6228	5000K				
	*Contact for other Wattages		*Contact for custom	*Specify other			*Contact Solera for other lengths	

Lens		Light Pattern		Options		Finishes	
CGB	Clear Glass Bullet	D	Down Light (Std)	SF	Single Fuse	BL	Black
PGB	Prismatic Glass Bullet			WL	Wet Location	WH	White
OPL	Opal Polycarbonate Lens			WG	Wire Guard	SG	Silver Grey
				DM	0-10V Dimming	BZ	Bronze
						*See finishes brochure for custom	

❖ Lumens are based on Max Wattage and 5000K CCT



Std - Standard Offering

RLM - \_ \_ \_ \_ \_

**Customization Notes:**


➤➤➤ Info on this spec sheet will change without notice as product development is an ongoing process.

### Dimensions & Mounting (drawings are not to scale)

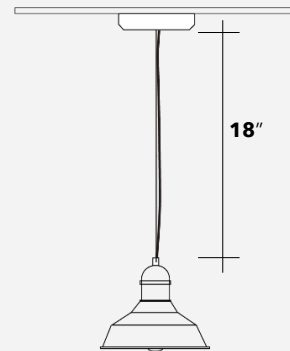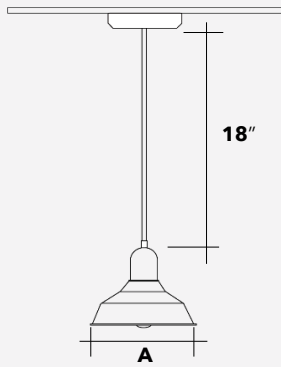

A
13"
16"
18"

### Polar Graph

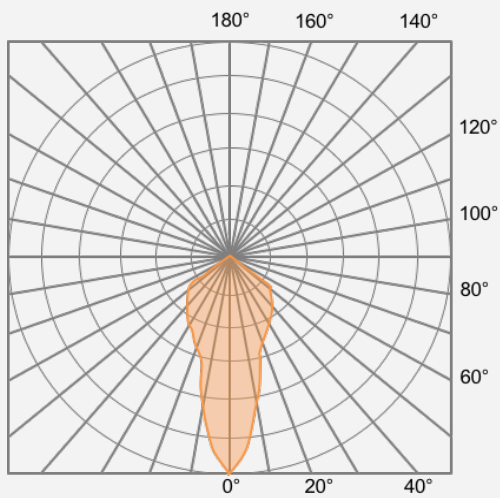

Down Light