




| |
|-----------------|
| Date: |
| Type: |
| Project: |

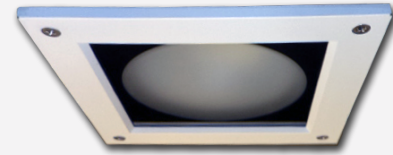

RSQ 6 - INDOOR RECESSED

DESCRIPTION:

Corrosion resistant aluminum housing with impact resistant glass.

| Name | Lamping | Lumens | Color Temp | Electrical | | Mounting | |
|-------|-----------------------------|---------------------|----------------|------------|----------|----------|---------------------------|
| RSQ 6 | 36W LED (Max) | 4325 | 3000K | UNV | 120-277V | R | Recessed Dry Ceiling |
| | 70MH | | 4000K | HLV | 347-480V | RT | Recessed in T-Bar Ceiling |
| | PLT42 | | 5000K | | | | |
| | *Contact for other wattages | *Contact for custom | *Specify other | | | | |

| Lens | | Light Pattern | | Options | | Finishes | | |
|------|----------------------------|---------------|------------|---------|-------------------------|----------|-------------------------------|--|
| PG | Prismatic Glass Lens (Std) | D | Down Light | TP | Tamperproof Hardware | BL | Black | |
| FG | Frosted Glass Lens | | | TS | Tamperproof Screwdriver | WH | White | |
| OPL | Opal Polycarbonate Lens | | | SF | Single Fuse | SG | Silver Grey | |
| | | | | | | BZ | Bronze | |
| | | | | | | | *See finishes info on website | |

✦ Lumens are based on Max Wattage and 5000K CCT


Std - Standard Offering

RSQ 6 - _____


Customization Notes:

➤➤➤ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

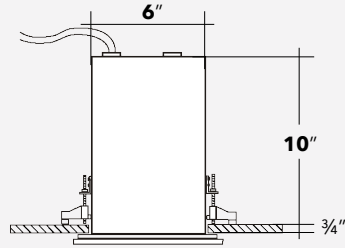


Side View



Bottom View

Polar Graph

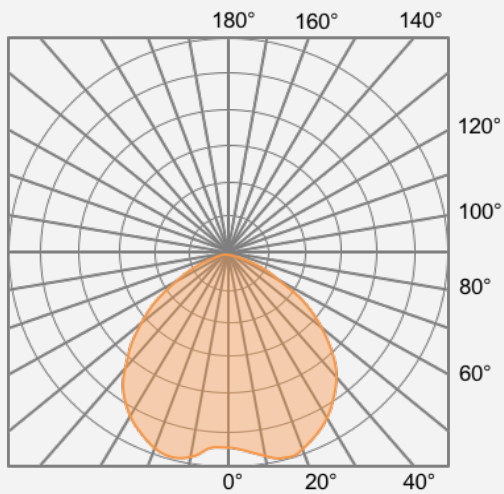

Down Light