



Date
Quote #
Project Name
Type



SAT-S - Pendant

Description:

Extruded aluminum housing with 3 vertical decorative bars and lens on the bottom. All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SAT-S	3W LED (Max)	428	2700K	UNV 120-277V
			3000K	HLV 347-480V
			3500K	
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom





Mounting		Lens		Light Pattern		Options		Finishes	
AC24	24" aircraft cable	CG	Clear glass lens (Std)	D	Down light (Std)	DM	0-10V dimming	BL	Black
CM	Ceiling mount					DM1	1% dimming	WH	White
								SG	Silver Grey
								BZ	Bronze
								CC	Custom Color
See website for custom colors. Contact factory for physical samples.									

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering



Dimensions & Mounting:

Please note that drawings are not to scale.

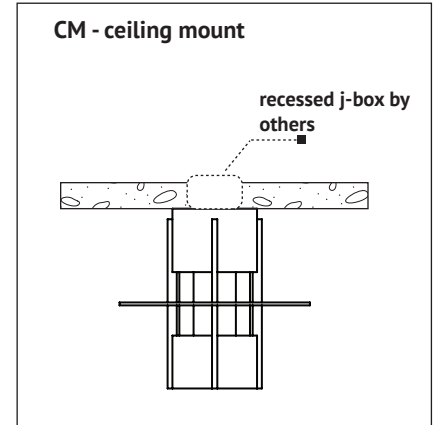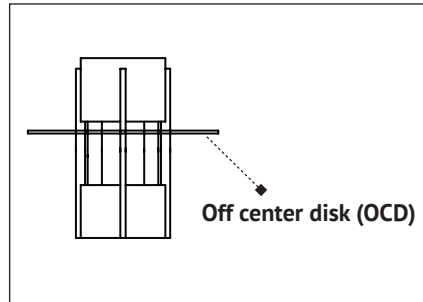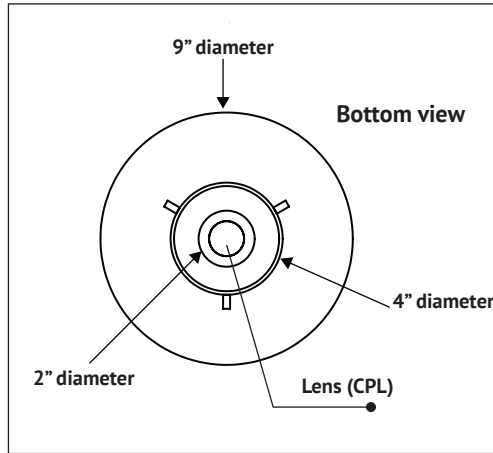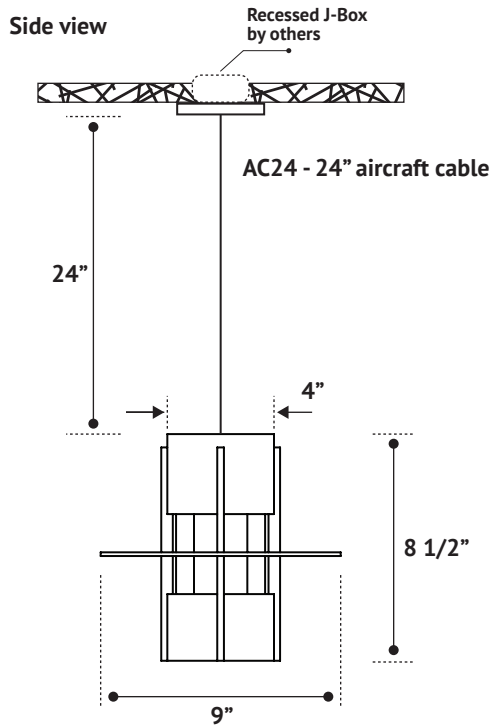

Listing:

Complies to CSA and UL standards.

Polar Graph:

