

<b>Date:</b>
<b>Type:</b>
<b>Project:</b>



**SBC - CEILING MOUNT**

**DESCRIPTION:**

Door frame design made of heavy duty aluminum. Ceiling mounted.

Name	Lamping		Lumens	Color Temp	Electrical		Mounting	
	Size	Wattage			UNV	Voltage	Mount	Mounting
SBC-6-12	6X12	18W LED (Max)	2378	3000K	UNV	120-277V	CM	Ceiling Mount
SBC-6-15	6X15	29W LED (Max)	3235	4000K	HLV	347-480V		
SBC-8-15	8X15	50W LED (Max)	7306	5000K				
SBC-8-18	8X18	50W LED (Max)	7306					
SBC-13-20	13X20	72W LED (Max)	9795					
	*Contact for other wattages		*Contact for custom	*Specify other			*Contact for other lengths	

Lens		Light Pattern		Options		Finishes		
CG	Clear Glass Lens	NB	Narrow Beam	IP65	IP65 Rated Enclosure	BL	Black	
FG	Frosted Glass Lens	MB	Medium Beam	AEL	Quartz Restrike (relay)	WH	White	
PG	Prismatic Glass Lens	WB	Wide Beam	MEL	Quartz Restrike (no relay)	SG	Silver Grey	
				DM	0-10V Dimming	BZ	Bronze	
							*See finishes brochure for custom	

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering


SBC - \_ \_ \_ \_ \_

**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.



## Dimensions & Mounting (drawings are not to scale)

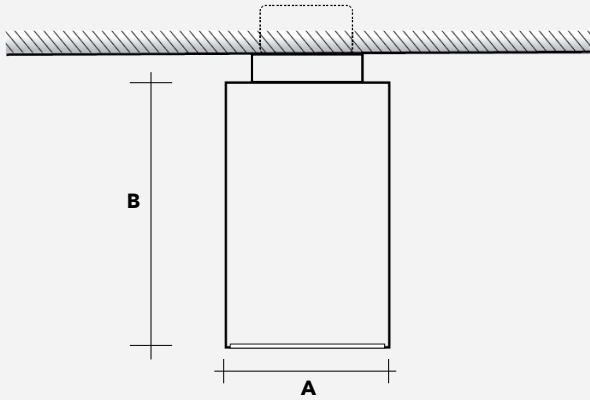

	A	B
SBC (6X12)	6"	12"
SBC (6X15)	6"	15"
SBC (8X16)	8"	15"
SBC (8X18)	8"	18"
SBC (13X20)	13"	20"

## Polar Graph

