



Date:

Type:

Project:



SBP - PENDANT

DESCRIPTION:

Door frame design made of heavy duty aluminum. Pendant mounted.

| Name | Lamping | | Lumens | Color Temp | Electrical | | Mounting | |
|-----------|-----------------------------|---------------|---------------------|----------------|------------|----------|----------------------------|-------------------------------|
| SBP-6-12 | 6X12 | 18W LED (Max) | 2378 | 3000K | UNV | 120-277V | P24 | 24" Stem Pendant |
| SBP-6-15 | 6X15 | 29W LED (Max) | 3235 | 4000K | HLV | 347-480V | AC24 | 24" Aircraft Cable |
| SBP-8-15 | 8X15 | 50W LED (Max) | 7306 | 5000K | | | 3C | Hook with 3' electrical cord |
| SBP-8-18 | 8X18 | 50W LED (Max) | 7306 | | | | 3CH | 3' chain with electrical cord |
| SBP-13-20 | 13X20 | 72W LED (Max) | 9795 | | | | | |
| | *Contact for other wattages | | *Contact for custom | *Specify other | | | *Contact for other lengths | |

| Lens | | Light Pattern | | Options | | Finishes | | |
|------|----------------------|---------------|-------------|---------|------------------------------|----------|-------------------------------|--|
| CG | Clear Glass Lens | NB | Narrow Beam | IP65 | IP65 Rated Enclosure | BL | Black | |
| FG | Frosted Glass Lens | MB | Medium Beam | AEL | Quartz Restrike (relay) | WH | White | |
| PG | Prismatic Glass Lens | WB | Wide Beam | MEL | Quartz Restrike (no relay) | SG | Silver Grey | |
| O | Open Bottom | | | CMB | Canopy Mounted Ballast | BZ | Bronze | |
| | | | | | | | *See finishes info on website | |

✦ Lumens are based on Max Wattage and 5000K CCT

Std - Standard Offering


SBP - _____

Customization Notes:

➤➤➤ Info on this spec sheet will change without notice as product development is an ongoing process.



Dimensions & Mounting (drawings are not to scale)

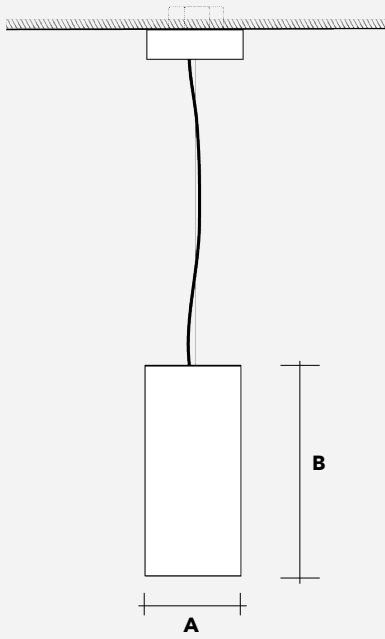

| | A | B |
|-------------|-----|-----|
| SBP (6X12) | 6" | 12" |
| SBP (6X15) | 6" | 15" |
| SBP (8X16) | 8" | 15" |
| SBP (8X18) | 8" | 18" |
| SBP (13X20) | 13" | 20" |

Polar Graph

