



Date
Quote #
Project Name
Type



### SCSD - Pole mount

**Description:**

SCSD is constructed of aluminum. Door assembly is hinged to fixture housing for easy access and maintenance.

Name  - Engine  - Lumens  - CCT  - Electrical  - Mounting  - Lens  - Pattern  - Options  - Finish

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
SCSD	288W LED (Max)	31436	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes					
ER3	Arm for round or square pole	CPL	Clear polycarbonate lens (Std)	TY5	Type V (Std)	SD	Step dimming	Standard					
						MS	Motion sensor	BL	Black				
SPD	Spider arm slip fitter	CG	Clear glass lens	TY4	Type IV	TCO	Trespass cut off	WH	White				
						PR	Prismatic lens (K12)	TY3	Type III	EM	Emergency battery	SG	Silver Grey
										TYII	Type II	PC	Button photocell
PCR	Photocell receptacle	Custom											
SF	Single fuse	CC	Custom Color										
DF	Double fuse	See website for custom colors. Contact factory for physical samples.											



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

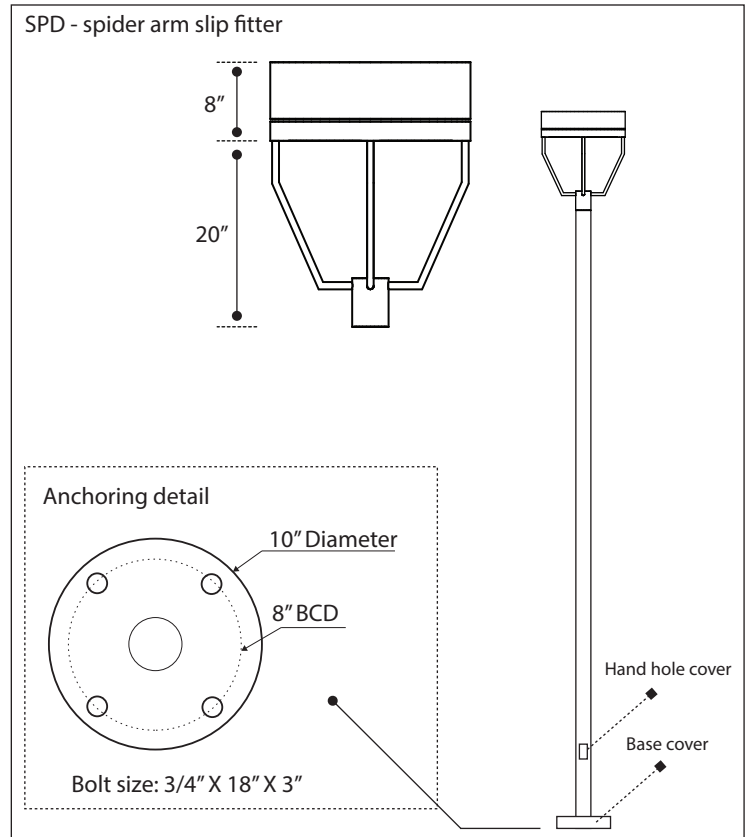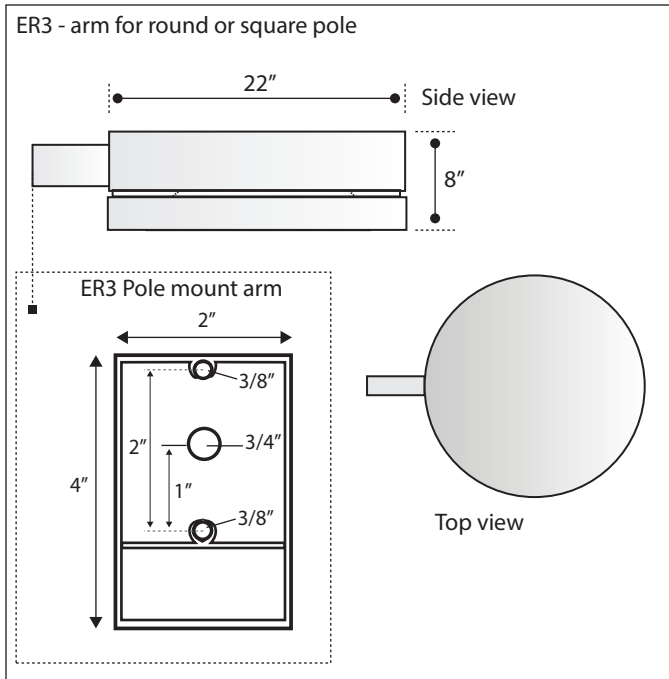


**Listing:**


Complies to CSA and UL standards.

**Polar Graph:**


TY5



TY4



TY3



TY2

