



<b>Date:</b>
<b>Type:</b>
<b>Project:</b>



### SCSG-22 - POST TOP/POLE MOUNT

**DESCRIPTION:**

Made of heavy gauge spun aluminum. Door assembly is hinged to the housing for ease of access.

Name	Lamping		Lumens ▼	Color Temp	Electrical		Mounting	
SCSG-18	18"	144W LED (Max) 150 HPS 175 MH	16227	3000K	UNV	120-277V	SPD	Spider pole mount Pole arm for round or square pole
SCSG-22				4000K	HLV	347-480V	ER3	
				5000K	TT	Tri-Tap (HID)		
	22"	288W LED (Max) 400 HPS 400 MH	31436		MT	Multi-Tap (HID)		
		*Contact Solera for other Wattages	*Contact for custom	*Specify other			*Contact Solera for other lengths	

Lens		Light Pattern		Options		Finishes		
CPL	Clear Polycarbonate Lens	TY5	Type V (Std)	PC	Button Photocell	BL	Black	
CG	Clear Glass Lens	TY2	Type II	PCR	Photocell Receptacle	WH	White	
		TY3	Type III	SF	Single Fuse	SG	Silver Grey	
		TY4	Type IV	DB	Double Fuse	BZ	Bronze	
							*See finishes info on website	

✦ Lumens are based on Max Wattage and 5000K CCT

▼ Lumens are for Type V distribution, contact for other spread patterns



Std - Standard Offering

SCSG - \_\_\_\_\_

**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.


### Dimensions & Mounting (drawings are not to scale)

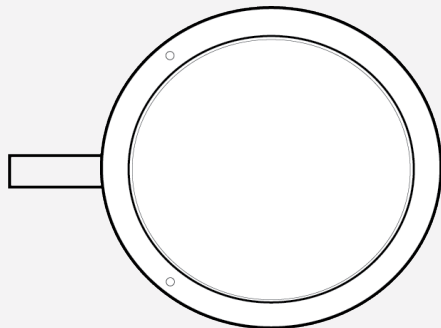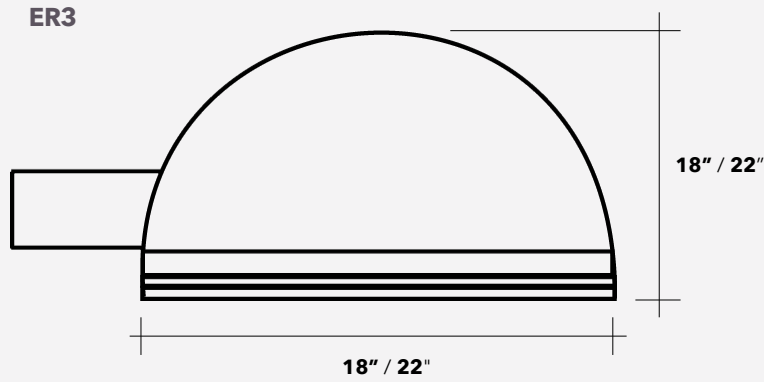


BOTTOM VIEW

### Polar Graph


TYPE II



TYPE III



TYPE IV



TYPE V

