



Date
Quote #
Project Name
Type



## SELS

### Description:

A square luminaire made of fabricated aluminum. A prismatic lens is standard, select between a flat or drop lens.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens(LED)	Color Temp	Electrical
SELS-S	S 60 LED (Max) 150 HPS	7803	2700K	UNV 120-277V
SELS-M	175 MH		3000K	HLV 347-480V
SELS-L	M 180 LED (Max) 250 HPS 4CFL42	19819	3500K	TT Tri-Tap(HID)
	L 360 LED (Max) 1000 HPS	38778	5000K	MT Multi-Tap(HID)
	<i>Contact for custom</i>	<i>Contact for custom</i>	<i>Contact for custom</i>	

Mounting	Lens	Light Pattern	Options	Finishes
CM Ceiling mount	PFL Prismatic flat lens (Std)	D Down light	DM 0-10V dimming	Door frame and aluminum housing for ceiling mount. Door frame only for recessed.
RP Recessed in plaster ceiling (Non-IC)	PDL Prismatic drop lens		DM1 1% dimming	BL Black
RT Recessed in T-Bar ceiling (Non-IC)			EM Emergency battery	WH White SG Silver Grey BZ Bronze CC Custom Color
				See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






**Dimensions & Mounting:**


Please note that drawings are not to scale.






SELS-L



SELS-M



SELS-S

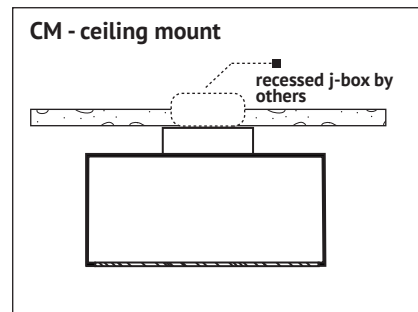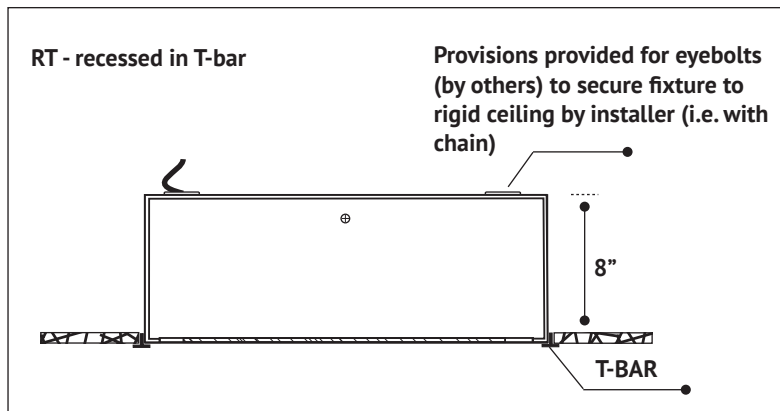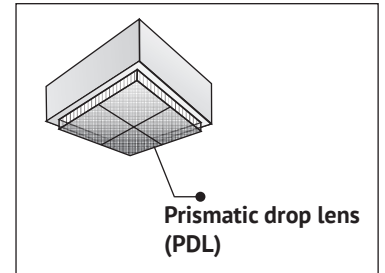

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

